



# GENERAL CONSTRUCTION

## General Construction

### Common Nail



Most popular nail and versatile style. For construction, carpentry and framing. Larger shank provides greater resistance to bending. Made to conform to ASTM F1667.

Common Nail		Bright Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14	13/64"	543	3C
1-1/2"	4D	12-1/2	1/4"	294	4C
1-3/4"	5D	12-1/2	1/4"	254	5C
2"	6D	11-1/2	17/64"	167	6C
2-1/4"	7D	11-1/2	17/64"	150	7C
2-1/2"	8D	10-1/4	9/32"	101	8C
3"	10D	9	5/16"	66	10C
3-1/4"	12D	9	5/16"	61	12C
3-1/2"	16D	8	11/32"	47	16C
4"	20D	6	13/32"	29	20C
4-1/2"	30D	5	7/16"	22	30C
5"	40D	4	15/32"	17	40C
5-1/2"	50D	3	1/2"	13	50C
6"	60D	2	17/32"	10	60C

Common Nail		Coated Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	17/64"	167	6CTDC
2-1/2"	8D	10-1/4	9/32"	101	8CTDC
3"	10D	9	5/16"	66	10CTDC
3-1/4"	12D	9	5/16"	61	12CTDC
3-1/2"	16D	8	11/32"	47	16CTDC
4"	20D	6	13/32"	29	20CTDC

Common Nail		Bright Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	17/64"	167	6ATC
2-1/2"	8D	10-1/4	9/32"	101	8ATC
3"	10D	9	5/16"	66	10ATC
3-1/4"	12D	9	5/16"	61	12ATC
3-1/2"	16D	8	11/32"	47	16ATC
4"	20D	6	13/32"	29	20ATC
4-1/2"	30D	5	7/16"	22	30ATC
5"	40D	4	15/32"	17	40ATC
6"	60D	2	17/32"	10	60ATC

Common Nail		Coated Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	17/64"	167	6CTDATC
2-1/2"	8D	10-1/4	9/32"	101	8CTDATC
3"	10D	9	5/16"	66	10CTDATC
3-1/2"	16D	8	11/32"	47	16CTDATC

Common Nail		Bright Spiral Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	17/64"	167	6STC
2-1/4"	7D	11-1/2	17/64"	150	7STC
2-1/2"	8D	10-1/4	9/32"	101	8STC
3-1/2"	16D	8	11/32"	47	16STC

Common Nail		Bright Ardox Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	17/64"	167	6ADXC
2-1/2"	8D	10-1/4	9/32"	101	8ADXC
3-1/2"	16D	8	11/32"	47	16ADXC
4"	20D	6	13/32"	29	20ADXC



### Box Nail

For construction, carpentry, framing, and box making. Smooth, thin shank reduces wood splitting. Made to conform to ASTM F1667.

Box Nail Bright Smooth Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14-1/2	7/32"	635	3BX
1-1/2"	4D	14	7/32"	473	4BX
1-3/4"	5D	14	7/32"	406	5BX
2"	6D	12-1/2	17/64"	236	6BX
2-1/4"	7D	12-1/2	17/64"	210	7BX
2-1/2"	8D	11-1/2	19/64"	145	8BX
3"	10D	10-1/2	5/16"	94	10BX
3-1/4"	12D	10-1/2	5/16"	88	12BX
3-1/2"	16D	10	11/32"	71	16BX
4"	20D	9	3/8"	52	20BX
5"	40D	8	13/32"	35	40BX

Box Nail Coated Smooth Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14-1/2	7/32"	635	3CTDBX
1-1/2"	4D	14	7/32"	473	4CTDBX
1-3/4"	5D	14	7/32"	406	5CTDBX
2"	6D	12-1/2	17/64"	236	6CTDBX
2-1/4"	7D	12-1/2	17/64"	210	7CTDBX
2-1/2"	8D	11-1/2	19/64"	145	8CTDBX
3"	10D	10-1/2	5/16"	94	10CTDBX
3-1/4"	12D	10-1/2	5/16"	88	12CTDBX
3-1/2"	16D	10	11/32"	71	16CTDBX
4"	20D	9	3/8"	52	20CTDBX

Box Nail Bright Ring Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	12-1/2	17/64"	236	6ATBX
2-1/2"	8D	11-1/2	19/64"	145	8ATBX
3-1/2"	16D	10	11/32"	71	16ATBX

Box Nail Gold Dichromate Ardox Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	7/32"	580	4GADXBX
2"	6D	13	17/64"	310	6GADXBX
2-1/2"	8D	12	19/64"	195	8GADXBX
3"	10D	11	5/16"	131	10GADXBX
3-1/2"	16D	9	11/32"	93	16GADXBX

### Duplex Nail

For temporary construction where nail removal is required, such as concrete forming and scaffolding. Smooth, uncoated shank and double head ease removal (second head remains exposed). Made to conform to ASTM F1667.

Duplex Nail Bright Double-head Shank					
Size*	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	6D	11-1/2	3/16" / 17/64"	156	6DUP
2-1/4"	8D	10-1/4	15/64" / 9/32"	90	8DUP
2-3/4"	10D	9	1/4" / 5/16"	59	10DUP
2-7/8"	12D	9	1/4" / 5/16"	57	12DUP
3"	16D	8	9/32" / 11/32"	45	16DUP
3-1/2"	20D	6	5/16" / 3/8"	28	20DUP

\*Measurement is from nail point to under bottom head.

### Framing Nail

Used for general construction where thinner shank for driving ease is desired. Thinner than a common nail, but slightly heavier than a box nail of comparable length.

Framing Nail Coated Barbed Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
3"	10D	10-1/4	19/64"	91	10CTDFRM
3-1/4"	12D	10-1/4	19/64"	84	12CTDFRM



# GENERAL CONSTRUCTION

## General Construction

### Sinker



For construction, carpentry and framing. Checkered countersunk head designed to sink flush with surface. Vinyl-coated smooth shank for easier nailing and firmer holding power. Made to conform to ASTM F1667.

Sinker		Coated Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/8"	3D	15-1/2"	11/64"	923	3CTDSKR
1-3/8"	4D	14	13/64"	527	4CTDSKR
1-5/8"	5D	13-1/2"	7/32"	387	5CTDSKR
1-7/8"	6D	13	15/64"	293	6CTDSKR
2-1/8"	7D	12-1/2"	1/4"	223	7CTDSKR
2-3/8"	8D	11-1/2"	17/64"	153	8CTDSKR
2-7/8"	10D	11	9/32"	111	10CTDSKR
3-1/8"	12D	10	5/16"	81	12CTDSKR
3-1/4"	16D	9	11/32"	64	16CTDSKR
3-3/4"	20D	7	3/8"	40	20CTDSKR
4-1/4"	30D	6	13/32"	30	30CTDSKR
4-3/4"	40D	5	7/16"	23	40CTDSKR
5-3/4"	60D	3	1/2"	14	60CTDSKR

### Cooler Nail



Used for general construction and framing. Similar to coated sinker, but with smooth flat head instead of checkered countersunk. Made to conform to ASTM F1667.

Cooler Nail		Vinyl Coated Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2-1/8"	7D	12-1/2"	17/64"	212	7COOL
2-3/8"	8D	11-1/2"	9/32"	144	8COOL
2-7/8"	10D	11	19/64"	105	10COOL

### Polebarn Nail



For load-bearing wooden structures where superior holding power is necessary. Nails are made of higher carbon steel for greater stiffness. Made to conform to ASTM F1667.

Polebarn Nail		Bright Stiff Stock Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	149	6RSPO
2-1/2"	8D	9	5/16"	78	8RSPO
3"	10D	9	5/16"	66	10RSPO
3-1/4"	12D	9	5/16"	61	12RSPO
3-1/2"	16D	9	5/16"	57	16RSPO
4"	20D	7	3/8"	35	20RSPO
4-1/2"	30D	7	3/8"	31	30RSPO
5"	40D	7	3/8"	28	40RSPO
5-1/2"	50D	7	3/8"	26	50RSPO
6"	60D	5	15/32"	17	60RSPO
7"	70D	5	15/32"	15	70RSPO
8"	80D	5	15/32"	13	80RSPO
10"	100D	5	15/32"	12	100RSPO

### Polebarn Nail Tempered Hardened Steel Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2-1/2"	8D	9	5/16"	78	8TRSPO
3"	10D	9	5/16"	66	10TRSPO
3-1/4"	12D	9	5/16"	61	12TRSPO
3-1/2"	16D	9	5/16"	57	16TRSPO
4"	20D	7	3/8"	35	20TRSPO
4-1/2"	30D	7	3/8"	31	30TRSPO
5"	40D	7	3/8"	28	40TRSPO
5-1/2"	50D	7	3/8"	26	50TRSPO
6"	60D	5	15/32"	17	60TRSPO
7"	70D	5	15/32"	15	70TRSPO
8"	80D	5	15/32"	13	80TRSPO



**ID** The Grip-Rite Fastener I.D. System is simple to use and convenient for everyone.



Select Grip-Rite hand drive and collated nails feature a number stamped on the head that lets both contractors and building inspectors identify them at a glance. The number stamped on the head is the key to all the relevant information about the fastener, including its size, description, type and item number.

The Grip-Rite Fastener I.D. System makes identifying fasteners, both before and after installation, easier than ever. Look for specially marked boxes for Grip-Rite Fastener I.D. System framing and joist nails.

**Joist Hanger Nail** 

For attaching joist hangers to wood studs. Short, heavy gauge nail provides increased holding power without fully penetrating wood.

**Joist Hanger Nail Bright Smooth or Barbed Shank**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	9	5/16"	149	114JST <b>(28)</b>
1-1/4"	10-1/4	9/32"	194	114JST10 <b>(27)</b>
1-1/4"	11	9/32"	240	114JST11 <b>(26)</b>
1-1/2"	9	5/16"	125	112JST <b>(10)</b>
1-1/2"	10-1/4	9/32"	165	112JST10
1-1/2"	11	9/32"	200	112JST11
1-3/4"	9	5/16"	65	134JST
2-1/2"	8	11/32"	62	212JST

**Joist Hanger Nail Bright Ring Shank**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	9	5/16"	125	112ATJST
1-3/4"	9	5/16"	62	134ATJST
2-1/2"	0.250"	1/2"	27	212ATJST

**Truss Nail** 

For attaching truss plates. As multiple nails are commonly used with truss plates, truss nails are thinner than joist hanger nails to minimize splitting of the wood trusses.

**Truss Nail Coated Smooth Shank**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	11	9/32"	223	114CTDTS
1-3/8"	11	9/32"	181	138CTDTS
1-1/2"	11	9/32"	168	112CTDTS

**Truss Nail Coated Ring Shank**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11	9/32"	128	112CTDRSTS

**Fence Staple** 

Generally used for attaching woven wire fence, welded fence, or barbed wire to wooden fence posts. Made to conform to ASTM F1667.

**Fence Staple Bright Smooth or Barbed**

Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
1"	9	1/4"	106	1FS
1-1/8"	9	1/4"	97	118FS
1-1/4"	9	1/4"	87	114FS
1-1/2"	9	1/4"	72	112FS
1-3/4"	9	1/4"	61	134FS
2"	9	1/4"	53	2FS

**Fence Staple Cement Coated Smooth or Barbed**

Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
1-1/4"	9	1/4"	87	114CCFS
1-1/2"	9	1/4"	72	112CCFS
1 3/4"	9	1/4"	61	134CCFS



# GENERAL CONSTRUCTION

## Finish and Trim Work

### Finish Nail

For trim and fine finishing work. Small diameter and cupped head for countersinking beneath the wood surface for filling and smooth finished appearance. Made to conform to ASTM F1667.

Finish Nail		Bright Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1"	2D	16-1/2	0.086"	1,473	2F
1-1/4"	3D	15-1/2	0.099"	880	3F
1-1/2"	4D	15	0.1055"	630	4F
1-3/4"	5D	15	0.1055"	535	5F
2"	6D	13	0.135"	288	6F
2-1/4"	7D	13	0.135"	254	7F
2-1/2"	8D	12-1/2	0.142"	196	8F
3"	10D	11-1/2	0.155"	124	10F
3-1/4"	12D	11-1/2	0.155"	113	12F
3-1/2"	16D	11	0.162"	93	16F
4"	20D	10	0.177"	65	20F

Finish Nail		Gold Dichromate Ardox Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	15	0.099"	833	3GADXF
1-1/2"	4D	14	0.1055"	595	4GADXF
2"	6D	13	0.135"	330	6GADXF
2-1/2"	8D	12	0.142"	221	8GADXF
3"	10D	11-3/4	0.155"	153	10GADXF
3-1/2"	16D	11	0.162"	121	16GADXF

### Trim Nail

For attaching hardwood mouldings (a.k.a. hardwood trim nail or moulding nail). Brad-style head for ease of concealment.

Trim Nail Tempered Hardened Steel Smooth Shank				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1"	15	7/64"	1,099	1TTRM
1-1/4"	15	7/64"	869	114TTRM
1-1/2"	15	7/64"	694	112TTRM
2"	15	7/64"	437	2TTRM
2-1/2"	13-1/2	1/8"	351	212TTRM

## Flooring and Masonry

### Underlayment Nail

For laying plywood or composition underlayment over existing wood floors or floor joists. Ringed shank for greater holding power.

Underlayment Nail Bright Ring Shank				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1"	12-1/2	1/4"	624	1ATUL
1-1/4"	12-1/2	1/4"	345	114ATUL
1-3/8"	12-1/2	1/4"	315	138ATUL
1-1/2"	12-1/2	1/4"	290	112ATUL
1-5/8"	12-1/2	1/4"	270	158ATUL
1-3/4"	12-1/2	1/4"	250	134ATUL
1-7/8"	12-1/2	1/4"	216	178ATUL
2"	12-1/2	1/4"	204	2ATUL
2-1/8"	12	17/64"	171	218ATUL
2-1/4"	12	17/64"	182	214ATUL
2-1/2"	12	17/64"	117	212ATUL
2-3/8"	11-1/2	19/64"	141	238ATUL

Underlayment Nail ElectroGalvanized Ring Shank				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1"	12-1/2	1/4"	624	1EGATUL
1-1/2"	12-1/2	1/4"	290	112EGATUL



### Cut Flooring Nail



For securing hardwood strip flooring to subfloor and to secure wood framing or furring strips to brick, block or concrete. Wide side of nail should always be driven parallel to the grain of the wood.

#### Cut Flooring Nail Tempered Hardened Steel Cut

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	4D	N/A	165	4CUTFLR
2"	6D	N/A	104	6CUTFLR
2-1/4"	7D	N/A	88	7CUTFLR
2-1/2"	8D	N/A	78	8CUTFLR
3"	10D	N/A	53	10CUTFLR
3-1/2"	16D	N/A	35	16CUTFLR

### Flooring Nail



For securing hardwood strip flooring to subfloor.

#### Flooring Nail Tempered Hardened Steel Spiral Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	4D	14	370	4FLR
2"	6D	11-1/2	180	6FLR
2-1/4"	7D	11-1/2	160	7FLR
2-1/2"	8D	11-1/2	110	8FLR
3"	10D	10	82	10FLR
3-1/2"	16D	9	58	16FLR

### Cut Masonry Nail



For attaching wood to cinder block, mortar joints, brick walls, and fresh concrete. Blunt point and tapered shank reduce splitting.

#### Cut Masonry Nail Tempered Hardened Steel Cut

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	3D	N/A	115	3CUTMAS
1-1/2"	4D	N/A	125	4CUTMAS
2"	6D	N/A	85	6CUTMAS
2-1/4"	7D	N/A	78	7CUTMAS
2-1/2"	8D	N/A	64	8CUTMAS
3"	10D	N/A	48	10CUTMAS
3-1/4"	12D	N/A	32	12CUTMAS
3-1/2"	16D	N/A	34	16CUTMAS
4"	20D	N/A	29	20CUTMAS

### Masonry Nail



For attaching furring strips and floor plates to uncured concrete. Made to conform to ASTM F1667.

#### Masonry Nail Tempered Hardened Steel Fluted Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/8"	9	5/16"	420	38TFMAS
1/2"	9	5/16"	355	12TFMAS
5/8"	9	5/16"	279	58TFMAS
3/4"	9	5/16"	248	34TFMAS
1"	9	5/16"	186	1TFMAS
1-1/4"	9	5/16"	152	114TFMAS
1-1/2"	9	5/16"	128	112TFMAS
1-3/4"	9	5/16"	112	134TFMAS
2"	9	5/16"	98	2TFMAS
2-1/4"	9	5/16"	84	214TFMAS
2-1/2"	9	5/16"	78	212TFMAS
2-3/4"	9	5/16"	56	234TFMAS
3"	9	5/16"	78	3TFMAS
3-1/4"	9	5/16"	60	314TFMAS
3-1/2"	8	11/32"	48	312TFMAS
3-3/4"	8	11/32"	45	334TFMAS
4"	7	3/8"	35	4TFMAS



# GENERAL CONSTRUCTION

## Flooring and Masonry

### Metal Round Cap Masonry Nail

For attaching foam insulation to exterior surfaces. Fluted to penetrate masonry without cracks.



### Masonry Nail Tempered Hardened Steel Fluted Shank With Metal Round Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
7/8"	8	1"	117	78RTFMS25
1"	8	1"	104	1RTFMS25
1-1/4"	8	1"	83	114RTFMS25
1-1/2"	8	1"	70	112RTFMS25
1-3/4"	8	1"	61	134RTFMS25
2"	8	1"	52	2RTFMS25
2-1/2"	8	1"	41	212RTFMS25
3"	8	1"	34	3RTFMS25
4"	8	1"	11	4RTFMS25

### Masonry "Stub" Nail

Similar to masonry nails, but with larger head. Used for a variety of applications that call for a smooth masonry-style nail, including fastening pipe conduit, switch boxes, corner beads or wire mesh to masonry walls.



### Stub Nail Tempered Hardened Steel Counter-sunk Head Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/8"	9	3/8"	391	389GTSTB
1/2"	9	3/8"	335	129GTSTB
5/8"	9	3/8"	279	589GTSTB
3/4"	9	3/8"	248	349GTSTB
1"	9	3/8"	186	19GTSTB
2-1/2"	9	3/8"	78	2129GTSTB

### Stub Nail Electrogalvanized Counter-sunk Head Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/8"	9	3/8"	391	38EGSTB
1/2"	9	3/8"	335	12EGSTB
5/8"	9	3/8"	279	58EGSTB
3/4"	9	3/8"	248	34EGSTB
1"	9	3/8"	186	1EGSTB
1-1/4"	9	3/8"	152	114EGSTB
1-1/2"	9	3/8"	128	112EGSTB
2"	9	3/8"	98	2EGSTB
2-1/2"	9	3/8"	78	212EGSTB

### Tension Pin

For attaching furring strips, clips, hangers, etc. to concrete block or mortared joints.



### Tension Pin Tempered Hardened Steel Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/8"	14	3/16"	610	118TP

### Tension Pin Electrogalvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/8"	14	3/16"	610	118EGTP



## Miscellaneous

### Spike



Used to secure railroad ties, landscaping timbers and thick members used in log home construction.

#### Spike Bright Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	5/16"	5/8"	6	7SPK
8"	3/8"	3/4"	3.3	8SPK
10"	3/8"	3/4"	2.9	10SPK
12"	3/8"	3/4"	2.5	12SPK
14"	3/8"	3/4"	2.1	14SPK

#### Spike Bright Ring Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	5/16"	5/8"	6	7RSSPK
8"	3/8"	3/4"	3.3	8RSSPK
10"	3/8"	3/4"	2.9	10RSSPK

#### Spike Bright Spiral Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
8"	5/16"	17/32"	5.2	8STSPK
10"	5/16"	17/32"	4.5	10STSPK
12"	5/16"	17/32"	3.7	12STSPK

### Gutter Spike



Used for securing gutters. Thinner shank and larger head than landscaping spikes. Also used as tile nails in certain geographic areas.

#### Gutter Spike Painted Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	3/16"	7/16"	16	7BRGTSPK (brown)
8"	3/16"	7/16"	14	8BRGTSPK (brown)
7"	3/16"	7/16"	16	7WGTSPK (white)

### Panel Board Nail



Used to attach panel board to wood furring or studs.

#### Panel Board Nail Tempered Hardened Steel Painted Ring Shank

Size	Gauge	Head Size	Approx. Count*	SKU
1"	16-1/2	0.101"	334 / 887	1PBWH (white)
1-5/8"	16-1/2	0.101"	192 / 544	158PBWH (white)
1"	16-1/2	0.101"	334 / 887	1PBBG (beige)
1-5/8"	16-1/2	0.101"	192 / 544	158PBBG (beige)
1"	16-1/2	0.101"	334 / 887	1PBBLK (black)
1-5/8"	16-1/2	0.101"	192 / 544	158PBBLK (black)
1"	16-1/2	0.101"	334 / 887	1PBLBR (light brown)
1-5/8"	16-1/2	0.101"	192 / 544	158PBLBR (light brown)
1"	16-1/2	0.101"	334 / 887	1PBMBR (medium brown)
1-5/8"	16-1/2	0.101"	192 / 544	158PBMBR (medium brown)
1"	16-1/2	0.101"	334 / 887	1PBBR (brown)
1-5/8"	16-1/2	0.101"	192 / 544	158PBBR (brown)
1"	16-1/2	0.101"	334 / 887	1PBDBR (dark brown)
1-5/8"	16-1/2	0.101"	192 / 544	158PBDBR (dark brown)
1"	16-1/2	0.101"	334 / 887	1PBGY (gray)
1-5/8"	16-1/2	0.101"	192 / 544	158PBGY (gray)

\* First figure is count per six ounces, second number is count per pound.



# GENERAL CONSTRUCTION

## Miscellaneous

### Wrought Head Cut Nail

Three-sided head and black oxide coating ideal for authentic restoration and antique effect.

Cut Nail		Wrought Three-sided Head Smooth Bulged Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	N/A	N/A	68	6CUTWH
2-1/2"	8D	N/A	N/A	48	8CUTWH

### Foundry Nail

Used for foundry casting work, concrete form work and metal sculpturing.

Foundry Nail		Bright Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
3"	9	1/2"	64	3FO	
4"	9	1/2"	49	4FO	
5"	9	1/2"	40	5FO	
6"	9	1/2"	33	6FO	

### Hinge Nail

Used for fastening antique hinges and face-nailing doors.

Hinge Nail		Bright Smooth Shank		
Size	Diameter	Head Size	Approx. Count Per Pound	SKU
1-1/2"	1/4"	1/2"	53	112HINGE
2"	1/4"	1/2"	39	2HINGE

### Nursery Nail

Used for fastening burlap around tree root balls.

Nursery Nail		Bright Oval Head Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
2"	14	1/4"	270	214OHN
2-1/4"	14	1/4"	240	21414OHN



**Pallet Nail** 

Provides maximum holding power for pallet construction and increased pallet life. Round, well-centered heads feed smoothly and efficiently through automated nailing equipment.

Pallet Nail Stiff Stock Ring Shank No Point				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11-1/2	9/32"	210	1121112RN
2"	11-1/2	9/32"	160	21112RN
2-1/4"	11-1/2	9/32"	145	2141112RN

Pallet Nail Stiff Stock Ring Shank Blunt Diamond Point				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
2"	11-1/2	9/32"	160	21112RBD
2-1/4"	11	9/32"	128	21411RBD
2-1/2"	11	9/32"	117	21211RBD
3"	11	9/32"	105	311RBD

Pallet Nail Stiff Stock Spiral Shank No Point				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11	9/32"	188	11211SN
1-5/8"	11	9/32"	180	15811SN
1-3/4"	11	9/32"	170	13411SN
2"	11	9/32"	144	211SN
2-1/4"	11	9/32"	129	21411SN
2-1/2"	11	9/32"	117	21211SN
3"	11	9/32"	105	311SN
1-1/2"	11-1/2	9/32"	211	1121112SN
1-5/8"	11-1/2	9/32"	203	1581112SN
1-3/4"	11-1/2	9/32"	193	1341112SN
2"	11-1/2	9/32"	163	21112SN
2-1/4"	11-1/2	9/32"	146	2141112SN
2-1/2"	11-1/2	9/32"	133	2121112SN
1-1/2"	12	1/4"	260	11212SN
1-5/8"	12	1/4"	244	15812SN
1 3/4"	12	1/4"	235	13412SN
2"	12	1/4"	211	212SN
2-1/4"	12	1/4"	185	21412SN
2-1/2"	12	1/4"	171	21212SN

Pallet Nail Stiff Stock Spiral Shank Blunt Diamond Point				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11	9/32"	188	11211SBD
1-5/8"	11	9/32"	180	15811SBD
1-3/4"	11	9/32"	170	13411SBD
2"	11	9/32"	144	211SBD
2-1/4"	11	9/32"	129	21411SBD
2-1/2"	11	9/32"	117	21211SBD
3"	11	9/32"	105	311SBD
1-1/2"	11-1/2	9/32"	211	1121112SBD
1-5/8"	11-1/2	9/32"	203	1581112SBD
1-3/4"	11-1/2	9/32"	193	1341112SBD
2"	11-1/2	9/32"	163	21112SBD
2-1/4"	11-1/2	9/32"	146	2141112SBD
2-1/2"	11-1/2	9/32"	133	2121112SBD
1-1/2"	12	1/4"	260	11212SBD
1-5/8"	12	1/4"	244	15812SBD
1-3/4"	12	1/4"	235	13412SBD
2"	12	1/4"	211	212SBD
2-1/4"	12	1/4"	185	21412SBD
2-1/2"	12	1/4"	171	21212SBD

Pallet Nail Tempered Hardened Steel Spiral Shank No Point				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
2-1/4"	11-1/2	9/32"	146	2141112TN
2-1/2"	11	9/32"	117	21211TN



# OUTDOOR CONSTRUCTION

## General Construction

### Common Nail



For construction, carpentry, and framing. Galvanized coating and larger shank provide greater strength. Made to conform to ASTM F1667.

Common Nail		Electrogalvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14	13/64"	543	3EGC
1-1/2"	4D	12-1/2	1/4"	294	4EGC
2"	6D	11-1/2	17/64"	167	6EGC
2-1/2"	8D	10-1/2	9/32"	101	8EGC
3"	10D	9	5/16"	66	10EGC
3-1/4"	12D	9	5/16"	61	12EGC
3-1/2"	16D	8	11/32"	47	16EGC
4"	20D	6	13/32"	29	20EGC
4-1/2"	30D	5	7/16"	22	30EGC
5"	40D	4	15/32"	17	40EGC
6"	60D	2	17/32"	10	60EGC

### Common Nail Hot Dipped Galvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14	13/64"	543	3HGC
1-1/2"	4D	12-1/2	1/4"	294	4HGC
1-3/4"	5D	12-1/2	1/4"	254	5HGC
2"	6D	11-1/2	17/64"	167	6HGC
2-1/4"	7D	11-1/2	17/64"	150	7HGC
2-1/2"	8D	10-1/4	9/32"	101	8HGC
3"	10D	9	5/16"	66	10HGC
3-1/4"	12D	9	5/16"	61	12HGC
3-1/2"	16D	8	11/32"	47	16HGC
4"	20D	6	13/32"	29	20HGC
4-1/2"	30D	5	7/16"	22	30HGC
5"	40D	4	15/32"	17	40HGC
5-1/2"	50D	3	1/2"	13	50HGC
6"	60D	2	17/32"	10	60HGC

### Common Nail Electrogalvanized Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	12-1/2	1/4"	294	4EGATC
2"	6D	11-1/2	17/64"	167	6EGATC
2-1/2"	8D	10-1/4	9/32"	101	8EGATC
3"	10D	9	5/16"	66	10EGATC
3-1/4"	12D	9	5/16"	61	12EGATC
3-1/2"	16D	8	11/32"	47	16EGATC
4"	20D	6	13/32"	29	20EGATC

### Common Nail Hot Dipped Galvanized Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14	13/64"	543	3HGATC
1-1/2"	4D	12-1/2	1/4"	294	4HGATC
2"	6D	11-1/2	17/64"	167	6HGATC
2-1/2"	8D	10-1/4	9/32"	101	8HGATC
3"	10D	9	5/16"	66	10HGATC
3-1/4"	12D	9	5/16"	61	12HGATC
3-1/2"	16D	8	11/32"	47	16HGATC
4"	20D	6	13/32"	29	20HGATC
5"	40D	4	15/32"	17	40HGATC
6"	60D	2	17/32"	10	60HGATC

### Box Nail



For construction, carpentry, and framing. Thinner shank reduces wood splitting. Made to conform to ASTM F1667.

### Box Nail Electrogalvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1"	2D	15-1/2	3/16"	940	2EGBX
1-1/4"	3D	14-1/2	7/32"	635	3EGBX
1-1/2"	4D	14	7/32"	473	4EGBX
1-3/4"	5D	14	7/32"	406	5EGBX
2"	6D	12-1/2	17/64"	236	6EGBX
2-1/4"	7D	12-1/2	17/64"	210	7EGBX
2-1/2"	8D	11-1/2	19/64"	145	8EGBX
3"	10D	10-1/2	5/16"	94	10EGBX
3-1/4"	12D	10-1/2	5/16"	88	12EGBX
3-1/2"	16D	10	11/32"	71	16EGBX
4"	20D	9	3/8"	52	20EGBX
4-1/2"	30D	9	3/8"	46	30EGBX
5"	40D	8	13/32"	35	40EGBX

### Box Nail Hot Dipped Galvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14-1/2	7/32"	635	3HGBX
1-1/2"	4D	14	7/32"	473	4HGBX
1-3/4"	5D	14	7/32"	406	5HGBX
2"	6D	12-1/2	17/64"	236	6HGBX
2-1/4"	7D	12-1/2	17/64"	210	7HGBX
2-1/2"	8D	11-1/2	19/64"	145	8HGBX
3"	10D	10-1/2	5/16"	94	10HGBX
3-1/4"	12D	10-1/2	5/16"	88	12HGBX
3-1/2"	16D	10	11/32"	71	16HGBX
4"	20D	9	3/8"	52	20HGBX
4-1/2"	30D	9	3/8"	46	30HGBX
5"	40D	8	13/32"	35	40HGBX



**Fence Nail**   
Used for fencing.

Fence Nail Electrogalvanized Ring Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	5D	11-1/2"	9/32"	142	134EGATBX

**Polebarn Nail**   
For load-bearing wooden structures where superior holding power is necessary. Made to conform to ASTM F1667.

Polebarn Nail Hot Dipped Galvanized Stiff Stock Ring Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	149	6HGRSPO
2-1/2"	8D	9	5/16"	78	8HGRSPO
3"	10D	9	5/16"	66	10HGRSPO
3-1/4"	12D	9	5/16"	61	12HGRSPO
3-1/2"	16D	9	5/16"	57	16HGRSPO
4"	20D	7	3/8"	35	20HGRSPO
4-1/2"	30D	7	3/8"	31	30HGRSPO
5"	40D	7	3/8"	28	40HGRSPO
5-1/2"	50D	7	3/8"	26	50HGRSPO
6"	60D	5	15/32"	17	60HGRSPO
7"	70D	5	15/32"	15	70HGRSPO
8"	80D	5	15/32"	13	80HGRSPO

Polebarn Nail Hot Dipped Galvanized Tempered Hardened Steel Ring Shank					
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
3"	10D	9	5/16"	66	10HGTPO
3-1/4"	12D	9	5/16"	61	12HGTPO
3-1/2"	16D	9	5/16"	57	16HGTPO
4"	20D	7	3/8"	35	20HGTPO
4-1/2"	30D	7	3/8"	31	30HGTPO
5"	40D	7	3/8"	28	40HGTPO
6"	60D	5	15/32"	17	60HGTPO
8"	80D	5	15/32"	13	80HGTPO

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.

**Poultry Net Staple**   
For attaching poultry net (a.k.a. chicken wire) fencing to wood. Made to conform to ASTM F1667.

Poultry Net Staple Electrogalvanized Smooth or Barbed				
Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
3/4"	14	3/16"	500	34EGPNS

Poultry Net Staple Hot Dipped Galvanized Smooth or Barbed				
Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
3/4"	14	3/16"	500	34HGPNS

**Vineyard Staple**   
For attaching vineyard trellis wire to vineyard post.

Vineyard Staple Electrogalvanized Smooth or Barbed				
Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
1"	12	1/4"	201	1EG12FS
1-1/4"	12	1/4"	151	114EG12FS
1-1/2"	12	1/4"	137	112EG12FS

**Fence Staple**   
For attaching wire fence to wood posts. Secondary uses include attaching suspended ceilings to wood rafters using galvanized tie wire, and insulation installation. Made to conform to ASTM F1667.

Fence Staple Electrogalvanized Smooth or Barbed				
Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
1"	9	1/4"	106	1EGFS
1-1/8"	9	1/4"	97	118EGFS
1-1/4"	9	1/4"	87	114EGFS
1-1/2"	9	1/4"	72	112EGFS
1-3/4"	9	1/4"	61	134EGFS
2"	9	1/4"	53	2EGFS
2-1/2"	6	1/2"	26	212EGFS



# OUTDOOR CONSTRUCTION

## General Construction

Fence Staple		Hot Dipped Galvanized Smooth or Barbed		
Size	Gauge	Crown Size	Approx. Count Per Pound	SKU
1"	9	1/4"	106	1HGFS
1-1/8"	9	1/4"	97	118HGFS
1-1/4"	9	1/4"	87	114HGFS
1-1/2"	9	1/4"	72	112HGFS
1-3/4"	9	1/4"	61	134HGFS
2"	9	1/4"	53	2HGFS
2-1/2"	6	1/4"	26	212HGFS

Joist Hanger Nail		Hot Dipped Galvanized Smooth or Barbed Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	9	5/16"	149	114HGJST <sup>(28)</sup>
1-1/4"	10-1/4	9/32"	194	114HGJST10 <sup>(27)</sup>
1-1/4"	11	9/32"	240	114HGJST11 <sup>(26)</sup>
1-1/2"	9	5/16"	125	112HGJST <sup>(10)</sup>
1-1/2"	10-1/4	9/32"	165	112HGJST10
1-1/2"	11	9/32"	200	112HGJST11
1-3/4"	9	5/16"	65	134HGJST

<sup>(ID)</sup> The Grip-Rite Fastener I.D. System is simple to use and convenient for everyone.



Select Grip-Rite hand drive and collated nails feature a number stamped on the head that lets both contractors and building inspectors identify them at a glance.

The number stamped on the head is the key to all the relevant information about the fastener, including its size, description, type and item number.

The Grip-Rite Fastener I.D. System makes identifying fasteners, both before and after installation, easier than ever. Look for specially marked boxes for Grip-Rite Fastener I.D. System framing and joist nails.

**Joist Hanger Nail** 

For attaching joist hangers to wood studs. Short, heavy gauge nail provides increased holding power without fully penetrating wood.

Joist Hanger Nail		Electrogalvanized Smooth or Barbed Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	9	5/16"	149	114EGJST <sup>(28)</sup>
1-1/4"	10-1/4	9/32"	194	114EGJST10 <sup>(27)</sup>
1-1/4"	11	9/32"	240	114EGJST11 <sup>(26)</sup>
1-1/2"	9	5/16"	125	112EGJST <sup>(10)</sup>
1-1/2"	10-1/4	9/32"	165	112EGJST10
1-1/2"	11	9/32"	125	112EGJST11
2-1/2"	8	11/32"	62	212EGJST

Joist Hanger Nail		Hot Dipped Galvanized Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	9	5/16"	149	114HGATJST

## Finish and Trim Work

**Finish Nail** 

For trim and fine finishing work. Small, countersinking head for nail concealment. Made to conform to ASTM F1667.

Finish Nail		Electrogalvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	15-1/2	0.099"	635	3EGF
1-1/2"	4D	15	0.1055"	473	4EGF
1-3/4"	5D	15	0.1055"	406	5EGF
2"	6D	13	0.135"	236	6EGF
2-1/2"	8D	12-1/2	0.142"	145	8EGF
3"	10D	11-1/2	0.155"	94	10EGF
3-1/4"	12D	11-1/2	0.155"	88	12EGF
3-1/2"	16D	11	0.162"	71	16EGF
4"	20D	10	0.177"	52	20EGF

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.



Finish Nail		Hot Dipped Galvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1"	2D	16-1/2	0.086"	1,473	2HGF
1-1/4"	3D	15-1/2	0.099"	880	3HGF
1-1/2"	4D	15	0.1055"	630	4HGF
1-3/4"	5D	15	0.1055"	535	5HGF
2"	6D	13	0.135"	288	6HGF
2-1/2"	8D	12-1/2	0.142"	196	8HGF
3"	10D	11-1/2	0.155"	124	10HGF
3-1/4"	12D	11-1/2	0.155"	113	12HGF
3-1/2"	16D	11	0.162"	93	16HGF
4"	20D	10	0.177"	65	20HGF

**Casing Nail**   
 For trim, window frames and decks. Made to conform to ASTM F1667.

Casing Nail		Electrogalvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	0.1205"	489	4EGCAS
2"	6D	12-1/2	0.142"	244	6EGCAS
2-1/2"	8D	11-1/2	0.155"	147	8EGCAS
3"	10D	10-1/2	0.17"	96	10EGCAS
3-1/4"	12D	10-1/2	0.17"	88	12EGCAS
3-1/2"	16D	10	0.177"	74	16EGCAS

Casing Nail		Hot Dipped Galvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	0.1205"	489	4HGCAS
2"	6D	12-1/2	0.142"	244	6HGCAS
2-1/4"	7D	12-1/2	0.142"	215	7HGCAS
2-1/2"	8D	11-1/2	0.155"	147	8HGCAS
3"	10D	10-1/2	0.17"	96	10HGCAS
3-1/4"	12D	10-1/2	0.17"	88	12HGCAS
3-1/2"	16D	10	0.177"	74	16HGCAS
4"	20D	9	0.192"	66	20HGCAS

Casing Nail		Hot Dipped Galvanized Spiral Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2-1/2"	8D	11-1/2	0.155"	147	8HGSTCAS
3"	10D	10-1/2	0.17"	96	10HGSTCAS
3-1/4"	12D	10-1/2	0.17"	88	12HGSTCAS
3-1/2"	16D	10	0.177"	74	16HGSTCAS

## Deck and Landscape

**Patio/Deck Nail**   
 For patio and deck construction.

Patio/Deck Nail		Hot Dipped Galvanized Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	138	6HGRSPD
2-1/2"	8D	11	9/32"	106	8HGRSPD
3"	10D	10	9/32"	76	10HGRSPD
3-1/4"	12D	10	9/32"	76	12HGRSPD
3-1/2"	16D	9	5/16"	52	16HGRSPD
4"	20D	7	3/8"	32	20HGRSPD
4-1/2"	30D	7	3/8"	28	30HGRSPD
5"	40D	7	3/8"	26	40HGRSPD
6"	60D	5	7/16"	17	60HGRSPD

Patio/Deck Nail		Hot Dipped Galvanized Spiral Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	138	6HGSTPD
2-1/2"	8D	11	9/32"	106	8HGSTPD
3"	10D	10	9/32"	76	10HGSTPD
3-1/4"	12D	10	9/32"	76	12HGSTPD
3-1/2"	16D	9	5/16"	52	16HGSTPD
4"	20D	7	3/8"	32	20HGSTPD
4-1/2"	30D	7	3/8"	28	30HGSTPD
5"	40D	7	3/8"	26	40HGSTPD
6"	60D	5	7/16"	17	60HGSTPD

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.



# OUTDOOR CONSTRUCTION

## Deck and Landscape

### Spike

Used to secure railroad ties, landscaping timbers and thick members used in log home construction.

#### Spike Hot Dipped Galvanized Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	5/16"	5/8"	6	7HGSPK
8"	3/8"	3/4"	3.3	8HGSPK
10"	3/8"	3/4"	2.9	10HGSPK
12"	3/8"	3/4"	2.5	12HGSPK
14"	3/8"	7/8"	2.1	14HGSPK

#### Spike Hot Dipped Galvanized Ring Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	5/16"	5/8"	6	7HGRSSPK
8"	3/8"	3/4"	3.3	8HGRSSPK
10"	3/8"	3/4"	2.9	10HGRSSPK
12"	3/8"	3/4"	2.5	12HGRSSPK

#### Spike Hot Dipped Galvanized Spiral Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
8"	5/16"	17/32"	5.2	8HGSTSPK
10"	5/16"	17/32"	4.5	10HGSTSPK
12"	5/16"	17/32"	3.7	12HGSTSPK

### Timber Tie

For securing landscape timbers. Similar to a spike, but thinner to minimize splitting.

#### Timber Tie Hot Dipped Galvanized Spiral Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU	
6"	60D	1/4"	1/2"	10	6HGTT

## Miscellaneous

### Gutter Spike

Long, strong spikes drive well. Oval heads hold firmly, have good appearance. For use with both galvanized steel and aluminum gutters.

#### Gutter Spike ElectroGalvanized Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	3/16"	7/16"	16	7EGGTSPK
8"	3/16"	7/16"	14	8EGGTSPK

#### Gutter Spike Hot Dipped Galvanized Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	3/16"	7/16"	16	7HGGTSPK
8"	3/16"	7/16"	14	8HGGTSPK

#### Gutter Spike Hot Dipped Galvanized Painted Smooth Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
8"	3/16"	7/16"	14	8WHGTSPK (white)

#### Gutter Spike ElectroGalvanized Ring Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	3/16"	7/16"	16	7EGRSGTSPK
8"	3/16"	7/16"	14	8EGRSGTSPK

#### Gutter Spike Hot Dipped Galvanized Ring Shank

Size	Diameter	Head Size	Approx. Count Per Pound	SKU
7"	3/16"	7/16"	16	7HGRSGTSPK
8"	3/16"	7/16"	14	8HGRSGTSPK

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.



## Exterior Screws

### Fine Nail

Extra-thin shank with standard head suitable for working with thin pieces of wood, such as crates or furring. Electrogalvanized nail commonly used to apply chamfer strip. Hot dipped galvanized nail also known as "lobster pot nails," as used to repair lobster crates. Also used for plywood in soffits and with cedar shingles.



Fine Nail		Electrogalvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/8"	3D	16	5/32"	938	3EGFINE

Fine Nail		Hot Dipped Galvanized Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/8"	3D	16	5/32"	938	3HGFINE

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.

### Exterior Screw

#### PrimeGuard Ten®

#### Bugle Head Sharp Point

Ten-year warranty against rust and corrosion, including when used with treated lumber. For outdoor projects including decks and fences.



Exterior Screw		Bugle Head Coarse Thread PrimeGuard Ten				
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU	
1" x 6	#2 Phillips	Sharp	10M	313	PTN1S	
1-1/4" x 6	#2 Phillips	Sharp	8M	218	PTN114S	
1-5/8" x 6	#2 Phillips	Sharp	5M	200	PTN158S	
2" x 7	#2 Phillips	Sharp	3.5M	134	PTN2S	
2-1/4" x 7	#2 Phillips	Sharp	3M	125	PTN214S	
2-1/2" x 8	#2 Phillips	Sharp	2.5M	86	PTN212S	
3" x 8	#2 Phillips	Sharp	2M	75	PTN3S	
3-1/2" x 10	#2 Phillips	Sharp	1.5M or 1M	43	PTN312S	
4" x 10	#2 Phillips	Sharp	1M	43	PTN4S	
5" x 10	#2 Phillips	Sharp	1M	37	PTN5S	
6" x 10	#2 Phillips	Sharp	1M	32	PTN6S	
1" x 6	#2 Square	Sharp	10M	313	PTN1SQ	
1-1/4" x 6	#2 Square	Sharp	8M	218	PTN114SQ	
1-5/8" x 6	#2 Square	Sharp	5M	200	PTN158SQ	
2" x 7	#2 Square	Sharp	3.5M	134	PTN2SQ	
2-1/4" x 7	#2 Square	Sharp	3M	125	PTN214SQ	
2-1/2" x 8	#2 Square	Sharp	2.5M	86	PTN212SQ	
3" x 8	#2 Square	Sharp	2M	75	PTN3SQ	
3-1/2" x 10	#2 Square	Sharp	1.5M or 1M	43	PTN312SQ	
4" x 10	#2 Square	Sharp	1M	43	PTN4SQ	
5" x 10	#2 Square	Sharp	1M	37	PTN5SQ	
6" x 10	#2 Square	Sharp	1M	32	PTN6SQ	



# ROOFING & SIDING

## Roofing and Siding

### Roofing Nail

For applying roofing asphalt shingles, insulation board, and felt-to-wood substrates. Large head and heavier shank gauge provide greater holding power. Electrogalvanized nail also appropriate for use with vinyl siding. Made to conform to ASTM F1667.



Roofing Nail		Electrogalvanized Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
7/8"	11	7/16"	306	78EGRSRFG
1"	11	7/16"	272	1EGRSRFG
1-1/4"	11	7/16"	218	114EGRSRFG
1-1/2"	11	7/16"	186	112EGRSRFG

### Roofing Nail Electrogalvanized Smooth or Barbed Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1/2"	11	7/16"	528	12EGRFG
5/8"	11	7/16"	436	58EGRFG
3/4"	11	7/16"	348	34EGRFG
7/8"	11	7/16"	306	78EGRFG
1"	11	7/16"	272	1EGRFG
1-1/4"	11	7/16"	218	114EGRFG
1-1/2"	11	7/16"	186	112EGRFG
1-3/4"	11	7/16"	152	134EGRFG
2"	11	7/16"	144	2EGRFG
2-1/2"	11	7/16"	114	212EGRFG
3"	11	7/16"	92	3EGRFG
3-1/2"	11	7/16"	89	312EGRFG
4"	11	7/16"	78	4EGRFG

### Roofing Nail Hot Dipped Galvanized Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1"	11	7/16"	255	1HGATRFG
1-1/4"	11	7/16"	210	114HGATRFG
1-1/2"	11	7/16"	180	112HGATRFG
1-3/4"	11	7/16"	150	134HGATRFG
2"	11	7/16"	138	2HGATRFG
2-1/2"	11	7/16"	108	212HGATRFG
3"	11	7/16"	90	3HGATRFG

### Tin Cap

Used with fasteners to create a larger surface area for holding materials in place.



### Tin Cap Round Metal Cap

Diameter	Approx. Count Per Pound*	SKU
1-5/8"	250	TINSM
2"	150	TINMD

\* Based on approximate metal cap thickness of .007".

### Roofing Nail Hot Dipped Galvanized Smooth or Barbed Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1/2"	11	7/16"	510	12HGRFG
5/8"	11	7/16"	417	58HGRFG
3/4"	11	7/16"	315	34HGRFG
7/8"	11	7/16"	280	78HGRFG
1"	11	7/16"	255	1HGRFG
1-1/4"	11	7/16"	210	114HGRFG
1-1/2"	11	7/16"	180	112HGRFG
1-3/4"	11	7/16"	150	134HGRFG
2"	11	7/16"	138	2HGRFG
2-1/2"	11	7/16"	108	212HGRFG
3"	11	7/16"	90	3HGRFG
3-1/2"	11	7/16"	87	312HGRFG
4"	11	7/16"	77	4HGRFG

### Grip-Cap® Plastic Cap Nail

For anchoring housewrap, sheathing, and felt. Wide head and ringed shank for greater holding power.



### Grip-Cap Nail Electrogalvanized Ring Shank With Round Plastic Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	266	GC34
7/8"	12	1"	275	GC78
1"	12	1"	250	GC1
1-1/4"	12	1"	212	GC114
1-1/2"	12	1"	185	GC112
1-3/4"	12	1"	168	GC134
2"	12	1"	153	GC2
2-1/2"	11	1"	133	GC212
3"	11	1"	117	GC3

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.



### Grip-Cap® Metal Cap Nail

For applying roofing asphalt shingles, insulation board, and felt-to-wood substrates. Large head and heavier shank gauge provide greater holding power.



### Grip-Cap Nail Bright Ring Shank With Square Metal Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	90	34MSCAP
7/8"	12	1"	88	78MSCAP
1"	12	1"	85	1MSCAP
1-1/4"	12	1"	81	114MSCAP
1-1/2"	12	1"	77	112MSCAP
1-3/4"	12	1"	67	134MSCAP
2"	12	1"	63	2MSCAP
2-1/2"	11	1"	57	212MSCAP
3"	11	1"	53	3MSCAP
3-1/2"	9	1"	49	312MSCAP
4"	9	1"	44	4MSCAP

### Grip-Cap Nail Bright Ring Shank With Round Metal Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	117	34MRCAP
7/8"	12	1"	112	78MRCAP
1"	12	1"	107	1MRCAP
1-1/4"	12	1"	100	114MRCAP
1-1/2"	12	1"	84	112MRCAP
1-3/4"	12	1"	79	134MRCAP
2"	12	1"	74	2MRCAP
2-1/2"	11	1"	67	212MRCAP
3"	11	1"	60	3MRCAP
3-1/2"	9	1"	42	312MRCAP
4"	9	1"	37	4MRCAP
5"	8	1"	27	5MRCAP
6"	8	1"	24	6MRCAP

### Grip-Cap Nail Electrogalvanized Ring Shank With Square Metal Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	90	34EGMSCAP
7/8"	12	1"	88	78EGMSCAP
1"	12	1"	85	1EGMSCAP
1-1/4"	12	1"	81	114EGMSCAP
1-1/2"	12	1"	77	112EGMSCAP
1-3/4"	12	1"	67	134EGMSCAP
2"	12	1"	63	2EGMSCAP
2-1/2"	11	1"	57	212EGMSCAP

### Grip-Cap Nail Bright Spiral Shank With Round Metal Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	117	34MRSTCAP
1"	12	1"	107	1MRSTCAP
1-1/4"	12	1"	100	114MRSTCAP
1-1/2"	12	1"	84	112MRSTCAP
1-3/4"	12	1"	79	134MRSTCAP
2"	12	1"	74	2MRSTCAP
2-1/2"	11	1"	67	212MRSTCAP
3"	11	1"	60	3MRSTCAP
3-1/2"	9	1"	42	312MRSTCAP
4"	9	1"	37	4MRSTCAP
5"	8	1"	27	5MRSTCAP
6"	8	1"	24	6MRSTCAP

### Grip-Cap Nail Electrogalvanized Ring Shank With Round Metal Cap

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	12	1"	117	34EGMRCAP
7/8"	12	1"	112	78EGMRCAP
1"	12	1"	107	1EGMRCAP
1-1/4"	12	1"	100	114EGMRCAP
1-1/2"	12	1"	84	112EGMRCAP
2"	12	1"	74	2EGMRCAP
2-1/2"	11	1"	67	212EGMRCAP
3"	11	1"	60	3EGMRCAP
3-1/2"	9	1"	42	312EGMRCAP
4"	9	1"	37	4EGMRCAP
5"	8	1"	27	5EGMRCAP
6"	8	1"	24	6EGMRCAP



# ROOFING & SIDING

## Roofing

### Roofing Nail with Neoprene Washer



For steel roofing and fiberglass roofing. Neoprene washer provides an effective waterproof seal.

Roofing Nail Electrogalvanized Ring Shank With Neoprene Washer				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	10	3/8"	118	112EGNEO
1-3/4"	10	3/8"	107	134EGNEO
2"	10	3/8"	96	2EGNEO
2-1/2"	10	3/8"	80	212EGNEO
3"	10	3/8"	66	3EGNEO
3-1/2"	9	3/8"	50	312EGNEO

Roofing Nail Hot Dipped Galvanized Ring Shank With Neoprene Washer				
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	10	3/8"	118	112HGNEO
1-3/4"	10	3/8"	107	134HGNEO
2"	10	3/8"	96	2HGNEO
2-1/2"	10	3/8"	80	212HGNEO
3"	10	3/8"	66	3HGNEO
3-1/2"	9	3/8"	50	312HGNEO

Roofing Nail		Hot Dipped Galvanized Painted Ring Shank with Neoprene Washer		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	10	3/8"	118	112BRNEO (brown)
1-3/4"	10	3/8"	107	134BRNEO (brown)
2"	10	3/8"	96	2BRNEO (brown)
2-1/2"	10	3/8"	80	212BRNEO (brown)
3"	10	3/8"	66	3BRNEO (brown)
3-1/2"	9	3/8"	50	312BRNEO (brown)
1-1/2"	10	3/8"	118	112GRNEO (gray)
1-3/4"	10	3/8"	107	134GRNEO (gray)
2"	10	3/8"	96	2GRNEO (gray)
2-1/2"	10	3/8"	80	212GRNEO (gray)
1-1/2"	10	3/8"	118	112BKNEO (black)
1-3/4"	10	3/8"	107	134BKNEO (black)
2"	10	3/8"	96	2BKNEO (black)
2-1/2"	10	3/8"	80	212BKNEO (black)
3"	10	3/8"	66	3BKNEO (black)
3-1/2"	9	3/8"	50	312BKNEO (black)
1-1/2"	10	3/8"	118	112RDNEO (red)
1-3/4"	10	3/8"	107	134RDNEO (red)
2"	10	3/8"	96	2RDNEO (red)
2-1/2"	10	3/8"	80	212RDNEO (red)
3"	10	3/8"	66	3RDNEO (red)
3-1/2"	9	3/8"	50	312RDNEO (red)
1-1/2"	10	3/8"	118	112TNNEO (tan)
1-3/4"	10	3/8"	107	134TNNEO (tan)
2"	10	3/8"	96	2TNNEO (tan)
2-1/2"	10	3/8"	80	212TNNEO (tan)
3"	10	3/8"	66	3TNNEO (tan)
3-1/2"	9	3/8"	50	312TNNEO (tan)
1-1/2"	10	3/8"	118	112WHNEO (white)
1-3/4"	10	3/8"	107	134WHNEO (white)
2"	10	3/8"	96	2WHNEO (white)
2-1/2"	10	3/8"	80	212WHNEO (white)
3"	10	3/8"	66	3WHNEO (white)
3-1/2"	9	3/8"	50	312WHNEO (white)

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.



**Roofing Nail with Neoprene Washer** 

For aluminum roofing and fiberglass roofing. Neoprene washer provides an effective waterproof seal.

Roofing Nail		Aluminum Ring Shank With Neoprene Washer		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-3/4"	9	3/8"	260	134ANEO

**Shingle Nail** 

For attaching thin sidewall shingles. Sturdy slim shank prevents splitting.\*\*

Shingle Nail		Hot Dipped Galvanized Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	3D	13	1/4"	425 3HGSHG
1-3/8"	3-1/2D	12-1/2	9/32"	345 312HGSHG
1-1/2"	4D	12	9/32"	271 4HGSHG

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.

\*\* Grip-Rite stainless steel nails or screws should be used for all redwood and cedar projects, for marine projects, and within 5 miles of coastline.

**Roofing Nail** 

For attaching copper flashing and other decorative copper roofing elements. Large head for greater holding power. Smooth shank for ease of penetration.

Roofing Nail		Copper Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
3/4"	11	3/8"	295	P34CPRFG
1"	11	3/8"	229	P1CPRFG
1-1/4"	11	3/8"	187	P114CPRFG
1-1/2"	11	3/8"	155	P112CPRFG
1-3/4"	11	3/8"	139	P134CPRFG
2"	11	3/8"	84	P2CPRFG
2-1/2"	11	3/8"	70	P212CPRFG

**Lead Head Nail** 

For metal roofing applications. Lead head flattens out with impact, creating a seal against the metal roof.

Lead Head Nail		Bright Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-3/4"	10	3/8"	88	134LH
2-1/2"	10	3/8"	71	212LH

**Tile Nail** 

For use with clay roofing tiles. Long shank is sturdy enough to insert through the predrilled hole in Spanish tile, while the oversized head prevents the nail from going all the way through the hole.

Tile Nail		Electrogalvanized Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
4"	9	15/32"	50	4EGTL
4-1/2"	9	15/32"	45	412EGTL
5"	9	15/32"	38	5EGTL
5-1/2"	8	15/32"	36	512EGTL
6"	8	15/32"	32	6EGTL
8"	8	15/32"	28	8EGTL



# ROOFING & SIDING

## Siding

### Shake Nail



For cedar shake applications. Smaller head for concealment. Slender shank minimizes splitting. Checkered head reduces hammer slippage.

#### Shake Nail Hot Dipped Galvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	5D	14	5/32"	344	5HGSM SK
2"	6D	14	5/32"	232	6HGSM SK

#### Shake Nail Hot Dipped Galvanized Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	5D	14	5/32"	404	134HGSK
2"	6D	14	5/32"	354	2HGSK
2-1/2"	8D	14	5/32"	294	212HGSK

### Split-proof™



### Wood Siding Nail

Thinner shank and blunt point minimizes splitting. Ringed shank for greater holding power. Checkered head reduces hammer slippage.

#### Wood Siding Nail Hot Dipped Galvanized Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	14	3/16"	283	6HGRSSS
2-1/2"	8D	13	7/32"	189	8HGRSSS
3"	10D	13	7/32"	153	10HGRSSS
3-1/4"	12D	12	1/4"	113	12HGRSSS
3-1/2"	16D	12	1/4"	104	16HGRSSS

### Wood & Hardboard Siding Nail



For attaching wood and hardboard siding. Extra-stiff shank for greater holding power.

#### Hardboard Siding Nail Hot Dipped Galvanized Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	7/32"	173	6HGSMHS
2-1/4"	7D	11-1/2	7/32"	156	7HGSMHS
2-1/2"	8D	11-1/2	7/32"	140	8HGSMHS
3"	10D	11	1/4"	108	10HGSMHS
3-1/4"	12D	11	1/4"	92	12HGSMHS
3-1/2"	16D	10-1/2	17/64"	80	16HGSMHS

#### Hardboard Siding Nail Hot Dipped Galvanized Spiral Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11-1/2	7/32"	173	6HGSTHS
2-1/4"	7D	11-1/2	7/32"	156	7HGSTHS
2-1/2"	8D	11-1/2	7/32"	140	8HGSTHS
3"	10D	11	1/4"	108	10HGSTHS
3-1/4"	12D	11	1/4"	92	12HGSTHS
3-1/2"	16D	10-1/2	17/64"	80	16HGSTHS

### Vinyl Siding Nail



For attaching vinyl siding. Oversized 3/8" head for increased holding power.

#### Vinyl Siding Nail Aluminum Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	12	3/8"	577	112ASDG
2"	12	3/8"	414	2ASDG

\* All Grip-Rite hot dipped galvanized fasteners meet ASTM A-153 requirements and can be used with treated lumber.

\*\* Grip-Rite stainless steel nails or screws should be used for all redwood and cedar projects, for marine projects, and within 5 miles of coastline.



**Oval Head Siding Nail**   
 For blind nailing of wood siding and clapboard.

**Oval Head Siding Nail Hot Dipped Galvanized Smooth Shank**

Size		Gauge	Head Size	Approx. Count Per Pound	SKU
2"	6D	12	15/64"	192	6HGOHS
2-1/4"	7D	12	15/64"	179	7HGOHS
2-1/2"	8D	12	15/64"	156	8HGOHS
3"	10D	12	15/64"	113	10HGOHS

**Furring Nail**   
 For attaching stucco wire mesh to exterior of structure in preparation for the application of stucco mud. Nail with wad used with paper that does not have wadding pre-attached. Nail without wad used with paper that has wadding already attached.

**Furring Nail Electrogalvanized Barbed Shank With Wad**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11	7/16"	161	112SMFUR
1-3/4"	11	7/16"	140	134SMFUR

**Furring Nail Electrogalvanized Barbed Shank w/o Wad**

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	11	7/16"	155	112EGFUR



# DRYWALL

## Drywall Nails

### Drywall Nail

For attaching gypsum boards to wood studs. Cupped saucer-head designed to countersink into drywall for ease of concealment. Long diamond point reduces cracking in drywall. Made to conform to ASTM C514.



### Drywall Nail

For attaching gypsum boards to wood studs. Long diamond point reduces cracking in drywall. Made to conform to ASTM C514.



Drywall Nail		Phosphate Coated Cupped Head Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-3/8"	13	19/64"	320	138PCDW
1-3/8"	13-1/2	9/32"	360	138PCDW135
1-3/8"	14	1/4"	508	138PCDW14
1-1/2"	13	19/64"	295	112PCDW
1-5/8"	13	19/64"	270	158PCDW
1-7/8"	13	19/64"	279	178PCDW
1-3/4"	13	19/64"	298	134PCDW
2"	13	19/64"	242	2PCDW
2-1/8"	13	19/64"	230	218PCDW
2-3/8"	11-1/2	3/8"	148	238PCDW

Drywall Nail		Phosphate Coated Cupped Head Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-3/8"	12-1/2	19/64"	316	138PCATDW

Drywall Nail		Cement Coated Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	12-1/2	11/32"	325	114CTDDW
1-3/8"	12-1/2	11/32"	302	138CTDDW
1-3/8"	13	3/8"	310	138CTDDWLH
1-1/2"	12-1/2	11/32"	281	112CTDDW
1-1/2"	13-1/2	3/8"	285	112CTDDWLH
1-5/8"	12-1/2	11/32"	264	158CTDDW
1-3/4"	12-1/2	11/32"	248	134CTDDW
1-7/8"	12-1/2	11/32"	234	178CTDDW
2"	12-1/2	11/32"	208	2CTDDW
2"	13	3/8"	235	2CTDDWLH
2-1/2"	12-1/2	11/32"	168	212CTDDW

Drywall Nail		Vinyl Coated Barbed Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-5/8"	12-1/2	11/32"	264	158VCDW
2"	12-1/2	11/32"	208	2VCDW

Drywall Nail		Bright Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	12-1/2	19/64"	324	114ATDW
1-3/8"	12-1/2	19/64"	316	138ATDW
1-1/2"	12-1/2	19/64"	308	112ATDW
1-5/8"	12-1/2	19/64"	295	158ATDW
1-3/4"	12-1/2	19/64"	209	134ATDW
1-7/8"	12-1/2	19/64"	174	178ATDW
2"	12-1/2	19/64"	160	2ATDW
2-1/4"	12-1/2	19/64"	111	214ATDW
2-1/2"	12-1/2	19/64"	62	212ATDW



Drywall Nail		Blued Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	12-1/2	19/64"	324	114BLDW
1-3/8"	12-1/2	19/64"	316	138BLDW
1-1/2"	12-1/2	19/64"	308	112BLDW
1-5/8"	12-1/2	19/64"	295	158BLDW
1-3/4"	12-1/2	19/64"	209	134BLDW
2"	12-1/2	19/64"	160	2BLDW

Drywall Nail		Electrogalvanized Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1"	12-1/2	19/64"	340	1EGDW
1-1/4"	12-1/2	19/64"	324	114EGDW
1-3/8"	12-1/2	19/64"	316	138EGDW
1-1/2"	12-1/2	19/64"	308	112EGDW
1-5/8"	12-1/2	19/64"	295	158EGDW
1-7/8"	12-1/2	19/64"	174	178EGDW
2"	12-1/2	19/64"	160	2EGDW

Drywall Nail		Hot Dipped Galvanized Ring Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	12-1/2	19/64"	324	114HGDW
1-1/2"	12-1/2	19/64"	308	112HGDW

**Lath Nail** 

For attaching lathing material. Heat sterilized to create blue oxide film resistant to corrosion.

Lath Nail		Blued Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1"	2D	16-1/2	9/64"	1,280	2BLULATH
1-1/8"	3D	16	11/64"	984	3BLULATH
1-1/2"	4D	14	7/32"	442	4BLULATH

**Plasterboard Nail** 

Large, flat head holds drywall secure, won't pull through. Blued sterilized finish for wallboard and composition plasterboard. Galvanized coating prevents "rusting through" in below-grade applications. Made to conform to ASTM C514.

Plasterboard Nail		Blued Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/8"	13	19/64"	440	118BLPL
1-1/4"	13	19/64"	415	114BLPL
1-1/2"	13	19/64"	307	112BLPL

Plasterboard Nail		Coated Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	13	19/64"	415	114CTDPL
1-1/2"	13	19/64"	307	112CTDPL

Plasterboard Nail		Electrogalvanized Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	13	19/64"	415	114EGPL
1-1/2"	13	19/64"	307	112EGPL
1-3/8"	12	19/64"	307	138EGPL

Plasterboard Nail		Hot Dipped Galvanized Smooth Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	13	19/64"	415	114HGPL
1-1/2"	13	19/64"	307	112HGPL



# DRYWALL

## Drywall Screws

### Drywall Screw

For attaching gypsum board to light-gauge steel studs. Made to conform to ASTM C1002.



### Drywall Screw

For attaching gypsum board to wood studs. Made to conform to ASTM C1002.



Drywall Screw		Bugle Head Fine Thread Phosphate Coated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Sharp	10M	313	1DWS
1-1/8" x 6	#2 Phillips	Sharp	10M	286	118DWS
1-1/4" x 6	#2 Phillips	Sharp	8M	258	114DWS
1-5/8" x 6	#2 Phillips	Sharp	5M	200	158DWS
2" x 6	#2 Phillips	Sharp	3.5M	175	2DWS
2-1/4" x 6	#2 Phillips	Sharp	3M	136	214DWS
2-1/2" x 8	#2 Phillips	Sharp	2.5M	119	212DWS
3" x 8	#2 Phillips	Sharp	2M	83	3DWS
3-1/2" x 10	#2 Phillips	Sharp	1M	65	312DWS
3-3/4" x 10	#2 Phillips	Sharp	1M	43	334DWS
4" x 10	#2 Phillips	Sharp	1M	42	4DWS
4-1/2" x 10	#2 Phillips	Sharp	1M	40	412DWS
5" x 10	#2 Phillips	Sharp	1M	37	5DWS
6" x 10	#2 Phillips	Sharp	1M	32	6DWS

Drywall Screw		Bugle Head Coarse Thread Phosphate Coated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Sharp	10M	313	1CDWS
1-1/8" x 6	#2 Phillips	Sharp	10M	286	118CDWS
1-1/4" x 6	#2 Phillips	Sharp	8M	258	114CDWS
1-1/2" x 6	#2 Phillips	Sharp	6M	250	112CDWS
1-5/8" x 6	#2 Phillips	Sharp	5M	200	158CDWS
2" x 6	#2 Phillips	Sharp	3.5M	175	2CDWS
2-1/4" x 6	#2 Phillips	Sharp	3M	136	214CDWS
2-1/2" x 8	#2 Phillips	Sharp	2.5M	119	212CDWS
3" x 8	#2 Phillips	Sharp	2M	83	3CDWS
3-1/2" x 10	#2 Phillips	Sharp	1M	43	312CDWS
3-3/4" x 10	#2 Phillips	Sharp	1M	43	334CDWS
4" x 10	#2 Phillips	Sharp	1M	43	4CDWS
4-1/2" x 10	#2 Phillips	Sharp	1M	42	412CDWS
5" x 10	#2 Phillips	Sharp	1M	37	5CDWS
6" x 10	#2 Phillips	Sharp	1M	32	6CDWS
1-1/4" x 6	#2 Square	Sharp	8M	258	114SCDWS
1-5/8" x 6	#2 Square	Sharp	5M	200	158SCDWS
2" x 6	#2 Square	Sharp	3.5M	175	2SCDWS
2-1/2" x 8	#2 Square	Sharp	2.5M	238	212SCDWS
3" x 8	#2 Square	Sharp	2M	83	3SCDWS



# SPECIALTY SCREWS

## General Construction

### General Purpose Screw

For wood to wood applications. Yellow zinc is cosmetically appealing for general woodworking (no rust protection). Made to conform to ASTM C1002.



### General Purpose Screw Bugle Head Coarse Thread Yellow Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Sharp	10M	313	1GS
1-1/4" x 6	#2 Phillips	Sharp	8M	258	114GS
1-5/8" x 6	#2 Phillips	Sharp	5M	200	158GS
2" x 6	#2 Phillips	Sharp	5M	250	2GS
2-1/4" x 6	#2 Phillips	Sharp	3M	136	214GS
2-1/2" x 8	#2 Phillips	Sharp	2.5M	119	212GS
3" x 8	#2 Phillips	Sharp	2M	83	3GS
3-1/2" x 10	#2 Phillips	Sharp	1M	43	312GS
4" x 10	#2 Phillips	Sharp	1M	43	4GS
5" x 10	#2 Phillips	Sharp	1M	37	5GS
6" x 10	#2 Phillips	Sharp	1M	32	6GS

## Drywall Screws

### Drywall Screw

For attaching gypsum board to 20-14 gauge steel studs. Made to conform to ASTM C954.



### Drywall Screw Bugle Head Fine Thread Phosphate Coated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Self-drill	10M	313	1SDDW
1-1/8" x 6	#2 Phillips	Self-drill	10M	286	118SDDW
1-1/4" x 6	#2 Phillips	Self-drill	8M	258	114SDDW
1-5/8" x 6	#2 Phillips	Self-drill	5M	200	158SDDW
1-7/8" x 6	#2 Phillips	Self-drill	4M	182	178SDDW
2-3/8" x 8	#2 Phillips	Self-drill	3M	125	238SDDW
2-5/8" x 8	#2 Phillips	Self-drill	2M	100	258SDDW
3" x 8	#2 Phillips	Self-drill	2M	83	3SDDW

### Drywall Screw Bugle Head Fine Thread Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Self-drill	10M	313	1ZSDS
1 1/8" x 6	#2 Phillips	Self-drill	10M	286	118ZSDS
1-1/4" x 6	#2 Phillips	Self-drill	8M	258	114ZSDS
1-5/8" x 6	#2 Phillips	Self-drill	5M	200	158ZSDS
1 7/8" x 6	#2 Phillips	Self-drill	4M	182	178ZSDS
2" x 6	#2 Phillips	Self-drill	3.5M	175	2ZSDS
2 3/8" x 8	#2 Phillips	Self-drill	3M	125	238ZSDS
2 5/8" x 8	#2 Phillips	Self-drill	2M	100	258ZSDS
3" x 8	#2 Phillips	Self-drill	2M	83	3ZSDS
3-1/2" x 8	#2 Phillips	Self-drill	1M	43	312ZSDS

### Drywall Screw

For attaching gypsum board to light-gauge steel. Also suitable for wood and plastic applications.



### Drywall Screw Bugle Head High-low Thread Phosphate Coated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#2 Phillips	Sharp	10M	333	1HLDW
1-1/4" x 7	#2 Phillips	Sharp	8M	235	114HLDW
1-5/8" x 7	#2 Phillips	Sharp	5M	185	158HLDW
2" x 7	#2 Phillips	Sharp	3.5M	140	2HLDW
2-1/4" x 7	#2 Phillips	Sharp	3M	136	214HLDW
2-1/2" x 8	#2 Phillips	Sharp	2.5M	119	212HLDW
3" x 8	#2 Phillips	Sharp	2M	105	3HLDW

### Laminator Screw

For temporary fastening of gypsum board to gypsum board in double wall requirements. Made to conform to ASTM C1002.



### Laminator Screw Bugle Head Coarse Thread Phosphate Coated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1 1/2" x 10	#2 Phillips	Sharp	5M	128	112LS



# SPECIALTY SCREWS

## Finish and Trim Work

### Trim Screw



For attaching wood trim and base over gypsum board to wood substrate or metal studs. Use sharp point with wood and light-gauge metal studs, self-drill with 20-14 gauge metal studs.

Trim Screw		Trim Head Fine Thread Phosphate Coated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1-5/8" x 6	#1 Phillips	Sharp	5M	208	158THDW
2-1/4" x 6	#1 Phillips	Sharp	3M	143	214THDW
3" x 8	#2 Phillips	Sharp	2M	87	3THDW
1" x 6	#1 Square	Sharp	10M	323	1STHDW
1-5/8" x 6	#1 Square	Sharp	5M	208	158STHDW
2-1/4" x 6	#1 Square	Sharp	3M	143	214STHDW
3" x 8	#2 Square	Sharp	2M	87	3STHDW

Trim Screw		Trim Head Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 6	#1 Square	Self-drill	10M	313	1SDTH
1-5/8" x 6	#1 Square	Self-drill	5M	217	158SDSTH
2-1/4" x 6	#1 Square	Self-drill	3M	158	214SDSTH

## Metal to Wood

### Hex Washer Head with Neoprene Washer Screw



For attaching metal roofing and siding to wood framing. Neoprene washer provides an effective waterproof seal.

Metal to Wood Screw		Hex Washer Head with Neoprene Washer Double-lead Thread Galvanized			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 9	1/4" Hex	Sharp	2.5M	115	1WF
1-1/2" x 9	1/4" Hex	Sharp	2.5M	93	112WF
2" x 9	1/4" Hex	Sharp	2M	76	2WF
2-1/2" x 9	1/4" Hex	Sharp	1.5M	65	212WF

Metal to Wood Screw		Hex Washer Head with Neoprene Washer High-low Thread Galvanized			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 10 -16	1/4" Hex	Type 17	2.5M	122	1W
1-1/2" x 10 -16	1/4" Hex	Type 17	2.5M	95	112W
2" x 10 -16	1/4" Hex	Type 17	2M	81	2W
2-1/2" x 10 -16	1/4" Hex	Type 17	1.5M	68	212W
3" x 10 -16	1/4" Hex	Type 17	1M	59	3W

Metal to Wood Screw		Hex Washer Head with Neoprene Washer High-low Thread Galvanized & Painted			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 10 -16	1/4" Hex	Sharp	2.5M	115	1WFW (white)
1-1/2" x 10 -16	1/4" Hex	Sharp	2.5M	93	112WFW (white)
2" x 9 -16	1/4" Hex	Sharp	2M	76	2WFW (white)
2-1/2" x 9 -16	1/4" Hex	Sharp	1M	65	212WFW (white)



# SPECIALTY SCREWS

## Wood to Metal

**Plywood to Metal Screw**  
For attaching 1/4"-1/2" plywood to 18-12 gauge metal.



Wood to Metal Screw		Wafer Head Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
3/4" x 10	#2 Phillips	#3 Self-drill	8M	211	WHD10034
1" x 10	#2 Phillips	#3 Self-drill	5M	235	WHD10100
1-1/4" x 10	#2 Phillips	#3 Self-drill	4M	121	WHD10114
1-1/2" x 10	#2 Phillips	#3 Self-drill	4M	105	WHD10112

**Wood to Metal Screw**  
For attaching 5/8"-3/4" plywood to 18-12 gauge metal. Wings reduce pre-drilling of wood.



Wood to Metal Screw		Wafer Head Fine Thread with Wings Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1-7/16" x 10	#2 Phillips	#3 Self-drill	3M	107	WHD10176

## Metal to Metal

**Pan Framing Screw**  
For attaching steel track to studs. Use sharp point for 25-20 gauge track to 25-20 gauge metal studs, self-drill for 20-16 gauge track to 20-16 gauge metal studs.



Pan Framing Screw		Pan Framing Head Fine Thread Phosphate Coated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
7/16" x 7	#2 Phillips	Sharp	10M or 15M	400	716FPHS
7/16" x 7	#2 Phillips	Self-drill	10M or 15M	400	716SDPH

Pan Framing Screw		Pan Framing Head Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
7/16" x 7	#2 Phillips	Self-drill	10M or 15M	400	716ZSDPH

**Pan Head Screw**  
For attaching strapping or furring channel to electrical boxes or fixtures.



Pan Head Screw		Pan Head Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1/2" x 6	#2 Phillips	#2 Self-drill	15M	484	PHD06012
1/2" x 8	#2 Phillips	#2 Self-drill	10M	303	PHD08012
1/2" x 10	#2 Phillips	#2 Self-drill	8M	216	PHD10012
5/8" x 10	#2 Phillips	#2 Self-drill	7M	206	PHD10058
3/4" x 10	#2 Phillips	#3 Self-drill	6M	176	PHD10034

**Modified Truss Screw**  
For attaching metal lath in stucco and other applications to wood or metal studs. Use sharp point for wood and 25-20 gauge metal studs, self-drill for 20-16 gauge metal studs.



Modified Truss Screw		Modified Truss Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1/2" x 8	#2 Phillips	Self-drill	10M	270	MTD08012
9/16" x 8	#2 Phillips	Self-drill	10M	227	MTD08916
3/4" x 8	#2 Phillips	Self-drill	10M	208	MTD08034
1" x 8	#2 Phillips	Self-drill	8M	186	MTD08100
1-1/4" x 8	#2 Phillips	Self-drill	6M	154	MTD08114
1-5/8" x 8	#2 Phillips	Self-drill	3M	125	MTD08158
1/2" x 8	#2 Phillips	Sharp	10M	270	MTS08012
9/16" x 8	#2 Phillips	Sharp	10M	227	MTS08916
3/4" x 8	#2 Phillips	Sharp	8M	167	MTS08034
1" x 8	#2 Phillips	Sharp	5M	116	MTS08100
1-1/4" x 8	#2 Phillips	Sharp	5M	128	MTS08114
1-5/8" x 8	#2 Phillips	Sharp	5M	208	MTS08158
1-7/8" x 8	#2 Phillips	Sharp	4M	103	MTS08178



# SPECIALTY SCREWS

## Metal to Metal

### Hex Washer Head Screw

For metal-to-metal fastening.



1/4" drive thread pitch 18 used with sheet metal and light-steel framing.

5/16" drive thread pitch 16 used with sheet metal and medium-steel fastening.

5/16" drive thread pitch 14 used commonly with up to 5 gauge steel.

3/8" drive thread pitch 14 used with heavy gauge steel.

5/16" drive thread pitch 24 used in heavier gauge metal, fastening sheet metal panels or clips.

### Metal to Metal Screw Hex Washer Head Fine Thread Pitch 18 Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1/2" x 8	1/4" Hex	#2 Self-drill	10M	303	HHD08012
5/8" x 8	1/4" Hex	#2 Self-drill	10M	256	HHD08058
3/4" x 8	1/4" Hex	#2 Self-drill	10M	227	HHD08034
1" x 8	1/4" Hex	#3 Self-drill	8M	190	HHD08100
1-1/4" x 8	1/4" Hex	#3 Self-drill	6M	162	HHD08114
1-1/2" x 8	1/4" Hex	#3 Self-drill	4M	143	HHD08112
2" x 8	1/4" Hex	#3 Self-drill	3M	115	HHD00200

### Metal to Metal Screw Hex Washer Head Fine Thread Pitch 16 Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1/2" x 10	5/16" Hex	#2 Self-drill	8M	200	HHD10012
5/8" x 10	5/16" Hex	#2 Self-drill	7M	171	HHD10058
3/4" x 10	5/16" Hex	#2 Self-drill	6M	158	HHD10034
1" x 10	5/16" Hex	#2 Self-drill	5M	132	HHD10100
1-1/4" x 10	5/16" Hex	#2 Self-drill	4M	118	HHD10114
1-1/2" x 10	5/16" Hex	#2 Self-drill	3M	100	HHD10112
2" x 10	5/16" Hex	#2 Self-drill	2M	80	HHD10200

### Metal to Metal Screw Hex Washer Head Fine Thread Pitch 14 Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
3/4" x 12	5/16" Hex	#3 Self-drill	5M	119	HHD12034
1" x 12	5/16" Hex	#3 Self-drill	3M	100	HHD12100
1-1/4" x 12	5/16" Hex	#3 Self-drill	3M	86	HHD12114
1-1/2" x 12	5/16" Hex	#3 Self-drill	3M	75	HHD12112
2" x 12	5/16" Hex	#3 Self-drill	2M	61	HHD12200
2-1/2" x 12	5/16" Hex	#3 Self-drill	1M	61	HHD12212
3" x 12	5/16" Hex	#3 Self-drill	1M	43	HHD12300
4" x 12	5/16" Hex	#3 Self-drill	500	22	HHD12400
3/4" x 14	3/8" Hex	#3 Self-drill	4M	78	HHD14034
1" x 14	3/8" Hex	#3 Self-drill	3M	68	HHD14100
1-1/4" x 14	3/8" Hex	#3 Self-drill	2M	59	HHD14114
1-1/2" x 14	3/8" Hex	#3 Self-drill	1M	50	HHD14112
2" x 14	3/8" Hex	#3 Self-drill	1M	40	HHD14200
2-1/2" x 14	3/8" Hex	#3 Self-drill	1M	37	HHD14212
3" x 14	3/8" Hex	#3 Self-drill	1M	33	HHD14300
4" x 14	3/8" Hex	#3 Self-drill	500	17	HHD14400

### Metal to Metal Screw Hex Washer Head Fine Thread Pitch 24 Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
7/8" x 12	5/16" Hex	#4 Self-drill	4M	133	HHD12078

### Stitch/Lap Screw

For fastening of overlapping light gauge metal panels or sheets.



### Metal to Metal Screw Hex Washer Head Fine Thread Zinc Plated

Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
7/8" x 14	5/16" Hex	#1 Self-drill	2.5M	79	78L



# SPECIALTY SCREWS

**Slotted Hex Washer Head Screw**  
 Self-piercing needle point penetrates sheet metal for 0.0209" to 0.0358".  
 For attaching H.V.A.C., electrical, and plumbing to metal framing, and for use with sheet metal.



Metal to Metal Screw		Slotted Hex Washer Head Fine Thread Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1/2" x 7	1/4" Hex	Self-piercing	15M	395	HHS07012
1/2" x 8	1/4" Hex	Self-piercing	10M	323	HHS08012
3/4" x 8	1/4" Hex	Self-piercing	10M	263	HHS08034
1" x 8	1/4" Hex	Self-piercing	8M	211	HHS08100
1-1/2" x 8	1/4" Hex	Self-piercing	5M	156	HHS08112
2" x 8	1/4" Hex	Self-piercing	3M	115	HHS08200

**Hex Washer Head with Neoprene Washer Screw**  
 For use in metal building applications when moisture needs to be sealed out. Neoprene washer provides an effective waterproof seal.



Metal to Metal Screw		Hex Washer Head with Neoprene Washer Fine Thread Zinc Plated			
Size	Drive	Point	Carton	Bulk Count Per Quantity	Approx. SKU Pound
1-1/4" x 10	5/16" Hex	#3 Self-drill	4M	91	ASD10114
1-1/4" x 14	5/16" Hex	#3 Self-drill	2M	50	ASD14114
1-1/2" x 14	5/16" Hex	#3 Self-drill	2M	44	ASD14112
1" x 14	5/16" Hex	#3 Self-drill	3M	58	ASD14100
2" x 14	5/16" Hex	#3 Self-drill	1M	36	ASD14200
3/4" x 14	5/16" Hex	#3 Self-drill	4M	65	ASD14034

Metal to Metal Screw		Hex Washer Head with Neoprene Washer Fine Thread Galvanized			
Size	Drive	Point	Carton	Bulk Count Per Quantity	Approx. SKU Pound
3/4" x 12 - 14	1/4" Hex	#3 Self-drill	2.5M	79	34M
1" x 12 - 14	1/4" Hex	#3 Self-drill	2.5M	68	1M
1-1/4" x 12 - 14	1/4" Hex	#3 Self-drill	2.5M	72	114M
1-1/2" x 12 - 14	1/4" Hex	#3 Self-drill	2M	56	112M
2" x 12 - 14	1/4" Hex	#3 Self-drill	1.5M	51	2M
2-1/2" x 12 - 14	1/4" Hex	#3 Self-drill	1M	46	212M

## Miscellaneous

**Cabinet Screw**  
 For attaching cabinets to wood.



Cabinet Screw		Round Washer Head Coarse Thread Yellow Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
2-3/8" x 8	Combo	Type 17	2M	104	238CAB
3" x 8	Combo	Type 17	2M	80	3CAB

**Cement Board Screw**  
 For attaching cement board to wood or metal studs. Use spade point for wood or 25-20 gauge metal studs, self-drill for 20-14 gauge metal studs.



Cement Board Screw		Wafer Head Fine Thread Rust-resistant Coating			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1-1/4" x 8	#2 Phillips	Self-drill	5M	161	114SDCB
1-5/8" x 8	#2 Phillips	Self-drill	5M	128	158SDCB

Cement Board Screw		Wafer Head High-low Thread Rust-resistant Coating			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1-1/4" x 8	#2 Phillips	Sharp	5M	161	114SPCB
1-5/8" x 8	#2 Phillips	Sharp	5M	128	158SPCB

**Overhead Garage Door Screw**  
 For attaching overhead garage door hardware to metal.



Garage Door Screw		Hex Washer Head Fine Thread Pitch 24 Zinc Plated			
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU
1" x 14 - 20	7/16" Hex	#3 Self-drill	2.5M	68	HHD47161



# PRIMEGUARD PLUS®

## PrimeGuard Plus®-coated

- Feature a proprietary polymer coating that protects the fastener against corrosive elements.
- Lifetime guarantee against rust and corrosion, including when used with treated lumber
- Stainless steel fasteners are recommended for all exterior applications.

### Exterior Screw

For exterior applications, including decks, siding, gazebos, and playsets. Countersinking bugle head prevents heads from popping out, leaves smooth finish.



Type 17 point reduces need to pre-drill boards.\* Available in combination drive or star drive.



Exterior Screw		Bugle Head Coarse Thread PrimeGuard Plus-coated				
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU	
<b>Green</b>						
1-1/4"	8	Combo	Type 17	8M	184	P114S
1-5/8"	8	Combo	Type 17	5M	147	P158S
2"	8	Combo	Type 17	3.5M	126	P2S
2-1/2"	9	Combo	Type 17	2.5M	87	P212S
3"	9	Combo	Type 17	2M	73	P3S
3-1/2"	10	Combo	Type 17	1M	56	P312S
4"	10	Combo	Type 17	1M	50	P4S
<b>Brown</b>						
1-1/4"	8	Combo	Type 17	8M	184	P114SB
1-5/8"	8	Combo	Type 17	5M	147	P158SB
2"	8	Combo	Type 17	3.5M	126	P2SB
2-1/2"	9	Combo	Type 17	2.5M	87	P212SB
3"	9	Combo	Type 17	2M	73	P3SB
3-1/2"	10	Combo	Type 17	1M	56	P312SB
4"	10	Combo	Type 17	1M	50	P4SB
<b>Gold</b>						
1-1/4"	8	Combo	Type 17	8M	184	P114SGD
1-5/8"	8	Combo	Type 17	5M	147	P158SGD
2"	8	Combo	Type 17	3.5M	126	P2SGD
2-1/2"	9	Combo	Type 17	2.5M	87	P212SGD
3"	9	Combo	Type 17	2M	73	P3SGD
3-1/2"	10	Combo	Type 17	1M	56	P312SGD
4"	10	Combo	Type 17	1M	50	P4SGD
<b>Red</b>						
1-1/4"	8	Combo	Type 17	8M	184	P114SR
1-5/8"	8	Combo	Type 17	5M	147	P158SR
2"	8	Combo	Type 17	3.5M	126	P2SR
2-1/2"	9	Combo	Type 17	2.5M	87	P212SR
3"	9	Combo	Type 17	2M	73	P3SR
3-1/2"	10	Combo	Type 17	1M	56	P312SR
4"	10	Combo	Type 17	1M	50	P4SR

Exterior Screw		Bugle Head Coarse Thread PrimeGuard Plus-coated				
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU	
<b>Green</b>						
1-1/4"	8	Star T-20	Type 17	8M	184	P114ST
1-5/8"	8	Star T-20	Type 17	5M	147	P158ST
2"	8	Star T-20	Type 17	3.5M	126	P2ST
2-1/2"	9	Star T-25	Type 17	2.5M	87	P212ST
3"	9	Star T-25	Type 17	2M	73	P3ST
3-1/2"	10	Star T-25	Type 17	1M	56	P312ST
4"	10	Star T-25	Type 17	1M	50	P4ST
<b>Brown</b>						
1-1/4"	8	Star T-20	Type 17	8M	184	P114STB
1-5/8"	8	Star T-20	Type 17	5M	147	P158STB
2"	8	Star T-20	Type 17	3.5M	126	P2STB
2-1/2"	9	Star T-25	Type 17	2.5M	87	P212STB
3"	9	Star T-25	Type 17	2M	73	P3STB
3-1/2"	10	Star T-25	Type 17	1M	56	P312STB
4"	10	Star T-25	Type 17	1M	50	P4STB
<b>Gold</b>						
1-1/4"	8	Star T-20	Type 17	8M	184	P114STGD
1-5/8"	8	Star T-20	Type 17	5M	147	P158STGD
2"	8	Star T-20	Type 17	3.5M	126	P2STGD
2-1/2"	9	Star T-25	Type 17	2.5M	87	P212STGD
3"	9	Star T-25	Type 17	2M	73	P3STGD
3-1/2"	10	Star T-25	Type 17	1M	56	P312STGD
4"	10	Star T-25	Type 17	1M	50	P4STGD
<b>Red</b>						
1-1/4"	8	Star T-20	Type 17	8M	184	P114STR
1-5/8"	8	Star T-20	Type 17	5M	147	P158STR
2"	8	Star T-20	Type 17	3.5M	126	P2STR
2-1/2"	9	Star T-25	Type 17	2.5M	87	P212STR
3"	9	Star T-25	Type 17	2M	73	P3STR
3-1/2"	10	Star T-25	Type 17	1M	56	P312STR
4"	10	Star T-25	Type 17	1M	50	P4STR

\*Refer to wood manufacturers' instructions, as some predrilling may still be required, even with Type 17 screw point.



### Composite Deck Screw

Ideal for applications using poly or composite lumber.

Square drive recess is deep and cleanly formed, reducing spinouts. Pancake head reduces over-driving, reduces mushrooming, leaves smooth finish.



Dual-thread design pulls fibers down, leaving smooth finish. Type 17 point reduces need to pre-drill boards.\*



Composite Deck Screw		Pancake Head Coarse Dual Thread		PrimeGuard Plus-coated		
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU	
<b>Brown</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CSB
2"	8	Square	Type 17	3.5M	122	H2CSB
2-1/2"	9	Square	Type 17	2.5M	75	H212CSB
3"	9	Square	Type 17	2M	54	H3CSB
3-1/2"	10	Square	Type 17	1M	47	H312CSB
<b>Gray</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CSG
2"	8	Square	Type 17	3.5M	122	H2CSG
2-1/2"	9	Square	Type 17	2.5M	75	H212CSG
3"	9	Square	Type 17	2M	54	H3CSG
3-1/2"	10	Square	Type 17	1M	47	H312CSG
<b>Red</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CSR
2"	8	Square	Type 17	3.5M	122	H2CSR
2-1/2"	9	Square	Type 17	2.5M	75	H212CSR
3"	9	Square	Type 17	2M	54	H3CSR
3-1/2"	10	Square	Type 17	1M	47	H312CSR

Composite Deck Screw		Pancake Head Coarse Dual Thread		PrimeGuard Plus-coated		
Size	Drive	Point	Bulk Carton Quantity	Approx. Count Per Pound	SKU	
<b>Dark Brown</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CDB
2"	8	Square	Type 17	3.5M	122	H2CDB
2-1/2"	9	Square	Type 17	2.5M	75	H212CDB
3"	9	Square	Type 17	2M	54	H3CDB
3-1/2"	10	Square	Type 17	1M	47	H312CDB
<b>Tan</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CST
2"	8	Square	Type 17	3.5M	122	H2CST
2-1/2"	9	Square	Type 17	2.5M	75	H212CST
3"	9	Square	Type 17	2M	54	H3CST
3-1/2"	10	Square	Type 17	1M	47	H312CST
<b>Dark Red</b>						
1-5/8"	8	Square	Type 17	5M	149	H158CDR
2"	8	Square	Type 17	3.5M	122	H2CDR
2-1/2"	9	Square	Type 17	2.5M	75	H212CDR
3"	9	Square	Type 17	2M	54	H3CDR
3-1/2"	10	Square	Type 17	1M	47	H312CDR

\* Refer to wood manufacturers' instructions, as some predrilling may still be required, even with Type 17 screw point.



# PRIMEGUARD PLUS

## PrimeGuard Plus®-coated

### Patio/Deck Nail

For patio and deck construction. Thin shank reduces splitting of wood. Checkered head reduces hammer slippage. Ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose, spiral shank reduces splitting in hard woods.



### Common Nail

Larger shank for greater strength. Smooth shank for easy installation, ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose.



Patio/Deck Nail		PrimeGuard Plus-coated Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	138	P6RSD
2-1/2"	8D	11	9/32"	106	P8RSD
3"	10D	10	9/32"	76	P10RSD
3-1/4"	12D	10	9/32"	76	P12RSD
3-1/2"	16D	9	5/16"	52	P16RSD

Patio/Deck Nail		PrimeGuard Plus-coated Spiral Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	138	P6STD
2-1/2"	8D	11	9/32"	106	P8STD
3"	10D	10	9/32"	76	P10STD
3-1/4"	12D	10	9/32"	76	P12STD
3-1/2"	16D	9	5/16"	52	P16STD

Common Nail		PrimeGuard Plus-coated Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1 1/2"	4D	12-1/2	1/4"	294	P4C
2"	6D	11-1/2	17/64"	167	P6C
2-1/2"	8D	10-1/4	9/32"	101	P8C
3"	10D	9	5/16"	66	P10C
3-1/4"	12D	9	5/16"	61	P12C
3-1/2"	16D	8	11/32"	47	P16C
4"	20D	6	13/32"	29	P20C

Common Nail		PrimeGuard Plus-coated Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1 1/2"	4D	12-1/2	1/4"	294	P4RSC
2"	6D	11-1/2	17/64"	167	P6RSC
2-1/2"	8D	10-1/4	9/32"	101	P8RSC
3"	10D	9	5/16"	66	P10RSC
3-1/2"	16D	8	11/32"	47	P16RSC
4"	20D	6	13/32"	29	P20RSC



### Box Nail

Thinner shank reduces wood splitting. Smooth shank for easy installation, ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose.



### Split-Proof™ Wood Siding Nail

For use with wood siding. Slim, sturdy shank and special blunt point virtually eliminate splits. Checkered head reduces hammer slippage. Ring shank for greater holding power.



Box Nail		PrimeGuard Plus-coated Smooth Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	3D	14-1/2	7/32"	635	P3BX
1-1/2"	4D	14	7/32"	473	P4BX
1-3/4"	5D	14	7/32"	406	P5BX
2"	6D	12-1/2	17/64"	236	P6BX
2-1/4"	7D	12-1/2	17/64"	210	P7BX
2-1/2"	8D	11-1/2	19/64"	145	P8BX
3"	10D	10-1/2	5/16"	94	P10BX
3-1/4"	12D	10-1/2	5/16"	88	P12BX
3 1/2"	16D	10	11/32"	71	P16BX
4"	20D	9	3/8"	52	P20BX

Split-Proof™ Wood Siding Nail		PrimeGuard Plus-coated Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	5D	14	3/16"	318	P5SPF
2"	6D	14	3/16"	283	P6SPF
2-1/4"	7D	14	3/16"	248	P7SPF
2-1/2"	8D	13	7/32"	189	P8SPF
3"	10D	13	7/32"	153	P10SPF
3-1/2"	16D	12	1/4"	104	P16SPF
<b>Brown</b>					
2"	6D	14	3/16"	283	P6SPFB
2-1/4"	7D	14	3/16"	248	P7SPFB
2-1/2"	8D	13	7/32"	189	P8SPFB
3"	10D	13	7/32"	153	P10SPFB
3-1/2"	16D	12	1/4"	104	P16SPFB
<b>White</b>					
1-3/4"	5D	14	3/16"	318	P5SPFW
2"	6D	14	3/16"	283	P6SPFW
2-1/4"	7D	14	3/16"	248	P7SPFW
2-1/2"	8D	13	7/32"	189	P8SPFW
3"	10D	13	7/32"	153	P10SPFW
3-1/2"	16D	12	1/4"	104	P16SPFW
<b>Cedar</b>					
1-3/4"	5D	14	3/16"	318	P5SPFC
2"	6D	14	3/16"	283	P6SPFC
2-1/2"	8D	13	7/32"	189	P8SPFC

Box Nail		PrimeGuard Plus-coated Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	7/32"	473	P4RSBX
2"	6D	12-1/2	17/64"	236	P6RSBX
2-1/2"	8D	11-1/2	19/64"	145	P8RSBX
3"	10D	10-1/2	5/16"	94	P10RSBX
3 1/2"	16D	10	11/32"	71	P16RSBX
<b>Brown</b>					
1-1/2"	4D	14	7/32"	473	P4RSBXB
2"	6D	12-1/2	17/64"	236	P6RSBXB
2-1/2"	8D	11-1/2	19/64"	145	P8RSBXB
3"	10D	10-1/2	5/16"	94	P10RSBXB
3 1/2"	16D	10	11/32"	71	P16RSBXB
<b>Red</b>					
1-1/2"	4D	14	7/32"	473	P4RSBXR
2"	6D	12-1/2	17/64"	236	P6RSBXR
2-1/2"	8D	11-1/2	19/64"	145	P8RSBXR
3"	10D	10-1/2	5/16"	94	P10RSBXR
3 1/2"	16D	10	11/32"	71	P16RSBXR
<b>White</b>					
1-1/2"	4D	14	7/32"	473	P4RSBXW
2"	6D	12-1/2	17/64"	236	P6RSBXW
2-1/2"	8D	11-1/2	19/64"	145	P8RSBXW
3"	10D	10-1/2	5/16"	94	P10RSBXW
3 1/2"	16D	10	11/32"	71	P16RSBXW



# PRIMEGUARD PLUS®

## PrimeGuard Plus®-coated

### Fiber Cement Siding Nail



For installation of most popular cement sidings. See manufacturer installation instructions for details. Ring shank for greater holding power. Higher carbon steel reduces possible nail bending. Smooth, flat head blends into siding surface.

### Fiber Cement Siding Nail PrimeGuard Plus-coated Ring Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/2"	12-1/2	17/64"	255	P112RSFCS
2"	12-1/2	17/64"	194	P2RSFCS
2-1/2"	11-1/2	9/32"	129	P212RSFCS
3"	11-1/2	9/32"	108	P3RSFCS

### Hardboard Siding Nail



For use with hardboard and wood siding. Smooth shank for easy installation, spiral shank reduces splitting in hard woods. Higher carbon steel reduces possible nail bending.

### Hardboard Siding Nail PrimeGuard Plus-coated Smooth Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	7/32"	473	P4SMHS
2"	6D	11-1/2	7/32"	173	P6SMHS
2-1/4"	7D	11-1/2	7/32"	156	P7SMHS
2-1/2"	8D	11-1/2	7/32"	140	P8SMHS
3"	10D	11	1/4"	108	P10SMHS

### Hardboard Siding Nail PrimeGuard Plus-coated Spiral Shank

Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	7/32"	473	P4STHS
2"	6D	11-1/2	7/32"	173	P6STHS
2-1/4"	7D	11-1/2	7/32"	156	P7STHS
2-1/2"	8D	11-1/2	7/32"	140	P8STHS
3"	10D	11	1/4"	108	P10STHS
3-1/4"	12D	11	1/4"	92	P12STHS
3-1/2"	16D	10-1/2"	17/64"	80	P16STHS

## PrimeGuard Plus® Stainless Steel Fasteners

- Lifetime guarantee against rust and corrosion when used with any wood, including all treated lumber, cedar, and redwood.

### Exterior Screw



For exterior applications, including decks, siding, gazebos, and playsets. Countersinking bugle head prevents heads from popping out, leaves smooth finish. Type 17 point reduces need to pre-drill boards.\* Square drive recess is deep and cleanly formed, reducing spinouts. #305 Stainless steel.

### Exterior Screw Bugle Head Coarse Thread Stainless Steel

Size	Drive	Point	Bulk Bucket Quantity	Approx. Count Per Pound	SKU	
1-1/4"	8	#2 Square	Type 17	25#	185	P114SLS
1-5/8"	8	#2 Square	Type 17	25#	150	P158SLS
2"	8	#2 Square	Type 17	25#	128	P2SLS
2-1/2"	10	#2 Square	Type 17	25#	82	P212SLS
3"	10	#2 Square	Type 17	25#	68	P3SLS
3-1/2"	10	#2 Square	Type 17	25#	58	P312SLS
4"	10	#2 Square	Type 17	25#	40	P4SLS



\* Refer to wood manufacturers' instructions, as some predrilling may still be required, even with Type 17 screw point.



### Trim Screw



For trim and railings, including poly or composite lumbers. Trim head easy to conceal, leaves smooth finish. Type 17 point reduces need to pre-drill boards.\* #305 Stainless steel.

Trim Screw		Trim Head		Coarse Thread		Stainless Steel	
Size	Drive	Point	Bulk Bucket Quantity	Approx. Count Per Pound	SKU	Free Bill	
1-5/8"	7	#1 Square	Type 17	25#	195	P158SLTS	
2-1/4"	7	#1 Square	Type 17	25#	138	P214SLTS	
3"	7	#2 Square	Type 17	25#	98	P3SLTS	

### Common Nail



For construction, carpentry, and framing. Larger shank for greater strength. Ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose. #304 Stainless steel.

Common Nail		Stainless Steel Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	12-1/2	1/4"	316	P4SLRSC
2"	6D	11-1/2	17/64"	181	P6SLRSC
2-1/2"	8D	10	9/32"	106	P8SLRSC
3"	10D	9	5/16"	69	P10SLRSC
3-1/4"	12D	9	5/16"	63	P12SLRSC
3-1/2"	16D	8	11/32"	49	P16SLRSC

### Patio/Deck Nail



For patio and deck construction. Thin shank reduces splitting of wood. Checkered head reduces hammer slippage. Ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose. Spiral shank reduces splitting in hard woods. #304 Stainless steel.

Patio/Deck Nail		Stainless Steel Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	152	P6SLRSD
2-1/2"	8D	11	9/32"	122	P8SLRSD
3"	10D	10	9/32"	84	P10SLRSD
3-1/4"	12D	10	9/32"	77	P12SLRSD
3-1/2"	16D	9	5/16"	58	P16SLRSD

### Box Nail



For construction, carpentry, and framing. Thinner shank reduces wood splitting. Ring shank for use with softer woods and with permanent heavy-duty construction where vibration can work nail loose. #304 Stainless steel.

Box Nail		Stainless Steel Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/2"	4D	14	7/32"	228	P4SLRSBX
2"	6D	12-1/2	17/64"	144	P6SLRSBX
2-1/2"	8D	12-1/2	9/32"	94	P8SLRSBX
3"	10D	11-1/2	9/32"	67	P10SLRSBX
3-1/2"	16D	11	9/32"	44	P16SLRSBX

Patio/Deck Nail		Stainless Steel Spiral Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	11	9/32"	152	P6SLSTD
2-1/2"	8D	11	9/32"	122	P8SLSTD
3"	10D	10	9/32"	84	P10SLSTD
3-1/4"	12D	10	9/32"	77	P12SLSTD
3-1/2"	16D	9	5/16"	58	P16SLSTD



# PRIMEGUARD PLUS®

## PrimeGuard Plus® Stainless Steel Fasteners

### Shake Nail



Designed for use with cedar shake. Thinner shank reduces wood splitting. Checkered head reduces hammer slippage. Ring shank for greater holding power. #304 Stainless steel.

Shake Nail		Stainless Steel Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-3/4"	5D	14	5/32"	337	P5SLSHAKE

### Split-Proof™ Wood Siding Nail



Designed for use with cedar siding. Slim, sturdy shank and special blunt point virtually eliminate splits. Checkered head reduces hammer slippage. Ring shank for greater holding power. #304 Stainless steel.

Siding Nail		Stainless Steel Ring Shank			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
2"	6D	14	5/32"	270	P6SLSPF
2-1/2"	8D	14	5/32"	200	P8SLSPF
3"	10D	13	7/32"	153	P10SLSPF

### Trim Nail



For split-prone woods such as cedar and redwood. Trim head easy to conceal, leaves smooth finish. #304 Stainless steel.

Trim Nail		Stainless Steel Smooth Shank - Painted			
Size	Gauge	Head Size	Approx. Count Per Pound	SKU	
1-1/4"	15	3/16"	685	P114SLTB (brown)	
1-1/4"	15	3/16"	685	P114SLTW (white)	

### Joist Hanger Nail



For attaching joist hangers to wood studs. Short, heavy gauge nail provides increased holding power without fully penetrating wood. #304 Stainless steel.

Joist Hanger Nail		Stainless Steel Smooth or Barbed Shank		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	10	5/16"	147	P114SLJS
1-1/2"	9	5/16"	126	P112SLJS

## PrimeGuard Plus® Aluminum Fasteners

Aluminum offers enhanced performance when used with wood or asbestos siding and shingles, roofing, aluminum and vinyl siding and trim, plastic panels, gutters and downspouts, porches, decks, and outdoor furniture. The surface of aluminum fasteners is ideally suited for painting. Aluminum fasteners are not recommended for use with treated lumber.

### Trim Nail



For attaching aluminum gutters, trim and other similar projects. Thin, smooth shank for easy installation. Available in white and brown.

Trim Nail		Aluminum Smooth Shank - Painted		
Size	Gauge	Head Size	Approx. Count Per Pound	SKU
1-1/4"	12-1/2	7/32"	1,040	P114ATB (brown)
1-1/4"	12-1/2	7/32"	1,040	P114ATW (white)




# ANCHOR BOLTS

## Anchor Bolts

### Anchor Bolts

For attaching bottom plate or sill plate to newly poured concrete foundation. Hot dipped galvanized anchor bolts and plates are recommended when working with treated lumber. ASTM F1554, Grade 36 and ASTM A307.

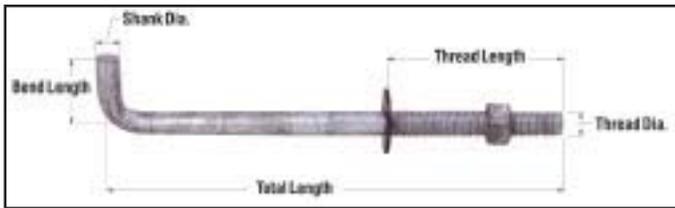

### Anchor Bolt Specification

Size	Thread Length	Bend Length	Total Length
1/2"	1.75" +0.24" / -0.0"	1.25" +0.12" / -0.062"	±0.12"
5/8"	3.75" +0.24" / -0.0"	1.5" +0.12" / -0.062"	±0.12"
3/4"	3.75" +0.24" / -0.0"	2.0" +0.12" / -0.062"	±0.12"
7/8"	3.75" +0.24" / -0.0"	2.0" +0.12" / -0.062"	±0.12"
1"	4.00" +0.24" / -0.0"	2.5" +0.12" / -0.062"	±0.12"



### Anchor Bolt with Round Washer



### Anchor Bolt Hot Dipped Galvanized with Nut & SAE Washer ASTM A153 Class C

Size	Quantity Per Box	Boxes Per Pallet	SKU
1/2 x 6"	50	50	126GAB50
1/2 x 8"	50	50	128GAB50
1/2 x 10"	50	50	1210GAB50
1/2 x 12"	50	50	1212GAB50
1/2 x 14"	50	50	1214GAB50
1/2 x 16"	50	50	1216GAB50
1/2" x 18"	50	50	1218GAB50
5/8" x 8"	25	50	588HGAB25
5/8" x 10"	25	50	5810HGAB25
5/8" x 12"	25	50	5812HGAB25
5/8" x 14"	25	50	5814HGAB25
5/8" x 16"	25	50	5816HGAB25

### Anchor Bolt Bright with Nut & Round SAE Washer

Size	Quantity Per Box	Boxes Per Pallet	SKU
3/8" x 6"	50	100	386AB50
3/8" x 8"	50	100	388AB50
1/2" x 6"	50	50	126AB50
1/2" x 8"	50	50	128AB50
1/2" x 10"	50	50	1210AB50
1/2" x 12"	50	50	1212AB50
1/2" x 14"	50	50	1214AB50
1/2" x 16"	50	50	1216AB50
1/2" x 18"	50	50	1218AB50
5/8" x 8"	25	50	588AB25
5/8" x 10"	25	50	5810AB25
5/8" x 12"	25	50	5812AB25
5/8" x 14"	25	50	5814AB25
5/8" x 16"	25	50	5816AB25
3/4" x 10"	20	25	3410AB20
3/4" x 12"	20	25	3412AB20
3/4" x 14"	20	25	3414AB20
3/4" x 15"	20	25	3415AB20
3/4" x 18"	20	25	3418AB20